



CATALOGUE 2023

JULY - DECEMBER

SUMMARY

m7 POWER

Cordless 18V 5Ah..... P.4 to 10
 Cordless P.11
 Electric..... P.11

m7 BOOST

Battery charger P.13
 Mini boosters P.13
 Starting booster P.14

m7 AIR

Pneumatic impact wrenches..... P.16 to 19
 Pneumatic ratchets..... P.20 to 21
 Pneumatic straight die grinder..... P.22
 Pneumatic angle grinder..... P.23 to 24
 Pneumatic micro die grinders P.23
 Pneumatic angle grinders..... P.24
 Pneumatic belt sanders P.25
 5-In-1 set P.25
 Pneumatic sanders..... P.26
 Pneumatic air sanders and polishers P.27
 Pneumatic screwdrivers P.27
 Pneumatic drills P.28
 Pneumatic riveters..... P.29
 Pneumatic insert riveters P.29
 Air hammers P.30
 Pneumatic needle scalers P.31
 Pneumatic shears and saws..... P.31
 Pneumatic blowguns P.32
 Lubrication P.32

m7 AUTO

Bodywork..... P.34
 Automotive mechanics and maintenance..... P.35

m7 GARAGE

Tool bag P.36
 Filtres régulateurs lubrificateurs P.37
 Maintenance P.37
 Systèmes pneumatiques P.38
 Cable reels P.38
 Griffes d'extractions..... P.39
 Magnetic mount..... P.39
 Spring balancer P.39
 Impact socket P.39
 Couplings..... P.40 and 41
 Compatibility P.42

! WARNING

- All pneumatic tools are to be used by hand. They are powered by compressed air and are not insulated against electric shock.
- Always cut the air supply and disconnect the air hose before changing a socket or accessory.
- Before using these tools, make sure that all couplings and plugs are correctly fastened. Pressurised air hoses can cause serious injury if they become disconnected!
- The high sound levels produced by pneumatic tools can cause permanent hearing damage. Always wear ear defenders during use.
- Always make sure that the sparks from grinding discs are directed away from the user and towards a no-risk area.
- Always wear gloves during use to reduce the risk of cuts and burns.
- The user must wear appropriate clothing. Loose clothing, long hair, ties, straps, belts and jewellery must not be worn during use.
- Prolonged use may cause fatigue. Take regular breaks for increased user safety.
- Discontinue use immediately in the case of strong fatigue or dizziness.
- Make sure that the work environment is free from gas and combustible materials before storing or servicing the tool.
- Working with certain materials can create dust or smoke. To reduce the risk of breathing in dust or debris, breathing protection is highly recommended.



CLASSIFICATION



Efficiency / performance

Simple use for completing tasks quickly. These tools combine efficiency and performance.



Strength

These tools produce high torque levels, superior grinding power and strong cutting energy



Endurance

Tools built to last with a low failure rate

GUARANTEE

M7 offers a **2 year** guarantee on its pneumatic and electric tools. **3 years** warranty on the Cordless power tools bodies. Start boosters, chargers and power tool batteries are guaranteed for **1 year**. Consumables are not guaranteed. The guarantee covers hidden defects and manufacturing faults. An item is only covered by the guarantee if it has been used correctly and for the purpose for which it was designed. The guarantee does not cover normal wear and tear caused by intense use or use over time.

TORQUE TESTS

Our torque tests are carried out in accordance with the ISO standard, using a 3-metre hose and air pressure set at 6.3 bars.

Torque capacity [Tightening test]

Torque range – The range (2 values) reached by the tool after 8 seconds, defined by the lowest speed (1st value) and the highest speed (2nd value) when tightening a fastener.



Max torque [loosening test]


Max torque - The maximum torque reached by the tool, after 5 seconds, when loosening a free fastener.



TORQUE LOSS PROBLEMS


1

Check that the selector is in the correct position




3

Put 5 drops of pneumatic oil into the air inlet then press the trigger



2

Check that the air pressure reaches 90 PSI (6.3 bars)



4

Send the tool to the service centre





POWER

It's
NEW!

DRH101K	P.5
DRH101A	P.5
DOM101	P.6
DOM101A1	P.6
QK131K3	P.6
QK131K4	P.6
QK131K5	P.6
QK131K6	P.6
QB9933V06K	P.6
QB9933V10K	P.6
QD9209	P.7
DR102K	P.8
DR102A1	P.8
DGG102K	P.9
DGG102A1	P.9
DHG101	P.9
DHG901	P.9



**18 V - 5Ah
DB1850P
BATTERY**
€113 D



**DC1840A €76 D
SMART CHARGER**

TOO HIGH OR TOO LOW TEMPERATURE
Charge between 0°C and 40°C
Red LED on
Green LED off

DEFFECTIVE BATTERY OR CHARGER
Red LED flashing
Green LED off

BATTERY CHARGING
Fast charge (50 minutes)
Red LED off
Green LED flashing

CHARGING DONE
Red LED off
Green LED on

(Black version : not available individually)

**QUICK CHARGING TIME
50 MINUTES**

A fully discharged battery will fully charge in 50 minutes at an ambient temperature between 0 °C and 40 °C.

**BATTERY CHARGE
LEVEL LED
INDICATOR**

- 80% - 100% charged
- 60% - 80% charged
- 40% - 59% charged
- 20% - 39% charged
- Less than 20% charged
- Completely discharged (Flashing LED)
- High / Low temperature (Flashing LED)

**SANYO
LITHIUM-ION
BATTERY CELLS**

- Charging faster than a standard battery.
- No memory effect
- Longer life.
- No loss of power.
- Lighter.

**BRUSHLESS
MOTOR**

EXCEPT : DW1840, DOS501, DG585, DJS101, DR102K, DGG102K, DHG102K & DFL101.

- No friction between the carbon brushes and the manifold (no more sparks at the engine outlet).
- Reduces the heat produced and therefore increases the life of the motor.
- No friction to preserve the energy produced by the engine.
- Longer battery life.
- Less wear parts

m7 18V Compatible with DB1850P

1/2" BRUSHLESS MOTOR

3 AUTO-STOP MODES

**813Nm / 18V
DW401**

(without charger nor battery)

CORDLESS COMPACT IMPACT WRENCH

3 levels of power for better machine control
3 auto-stop modes to limit the tightening torque during assembly work
Instant stop when the trigger is released: prevents damage to the object and secures the user
LED to illuminate the work area
Detachable belt hook

€175 D


ALSO AVAILABLE IN HARDCASE

DW401A

CORDLESS COMPACT IMPACT WRENCH SET 1/2"

- 1x Cordless 1/2" compact impact wrench (DW401)
- 2x 5Ah batteries (DB1850)
- 1x charger (DC1840A)

€465 D

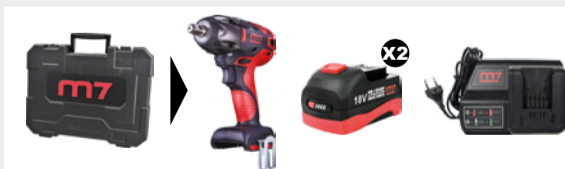

1/2" BRUSHLESS MOTOR

**1220Nm / 18V
DW1840**

(without charger nor battery)

CORDLESS IMPACT WRENCH

Instantly stops when the trigger is released: to avoid damage to the work piece and for user safety
In-built LED light
Forward/reverse selector on the sides

€269 D

ALSO AVAILABLE IN HARDCASE

DW18502A

CORDLESS IMPACT WRENCH SET 1/2"

- 1x Cordless 1/2" impact wrench
- 2x 5 Ah batteries (DB1850)
- 1x charger (DC1840A)

€529 D



3/4" BRUSHLESS MOTOR

**1900Nm / 18V
DW601**

(without charger nor battery)

CORDLESS IMPACT WRENCH

3 levels of power for better machine control
The Motor part is connected to the handle by anti-vibration silent blocks
Instant stop when the trigger is released: prevents damage to the object and secures the user
LED to illuminate the work area

€479 D

ALSO AVAILABLE IN HARDCASE

DW601A

CORDLESS IMPACT WRENCH SET 3/4"

- 1x Cordless 3/4" impact wrench (DW601)
- 2x 5 Ah batteries (DB1850P)
- 1x charger (DC1840A)

€769 D



	Battery power	Square drive	Bolt size	Max. Torque	Free speed	Blows frequency	Weight
	Ah - V	Inch	mm	Nm	R.P.M	Blows per minutes	kg
					N_0	bpm	
DW401	5 Ah - 18 V	1/2"	M6-M16	813	1100 / 1600 / 2200	1500 / 2500 / 3000	1.48
DW1840	5 Ah - 18 V	1/2"	M6-M24	1220	1900	2200	2.53
DW601	5 Ah - 18 V	3/4"	M10-M27	1900	900 / 1000 / 1700	1800 / 2000 / 2200	3.37



BRUSHLESS MOTOR



90 Nm / 18V
DD101

(without charger nor battery)
CORDLESS DRILL DRIVER

Brushless motor.
Jacobs® metal chuck (self-tightening and self-locking).
23 release positions + a drilling position.
2 Speeds: Low / High.
Impulse function, ideal for drilling on a painted surface and to replace damaged screws.
Work LED on the base with residual lighting.
Removable bit holder and belt hook.
1 side handle.

€163 D

ALSO AVAILABLE IN HARDCASE

DD101A

€453 D

CORDLESS DRILL DRIVER SET

- 1x Cordless drill driver (DD101)
- 1x side handle
- 2x 5Ah batteries (DB1850P)
- 1x charger (DC1840A)



HAMMER DRILL

BRUSHLESS MOTOR



90 Nm / 18V
DH101

(without charger nor battery)
CORDLESS HAMMER DRILL DRIVER

Brushless motor.
Jacobs® metal chuck (self-tightening and self-locking).
24+1 Release positions.
3 modes: Screwdriver / Drill / Hammer drill.
2 Speeds: Low / High.
Impulse function, ideal for drilling on a painted surface and to replace damaged screws.
Work LED on the base with residual lighting.
Removable bit holder and belt hook.
1 side handle.

€176 D

ALSO AVAILABLE IN HARDCASE

DH101A

€466 D

CORDLESS HAMMER DRILL DRIVER SET

- 1x Cordless hammer drill driver (DH101)
- 1x side handle
- 2x 5Ah batteries (DB1850P)
- 1x charger (DC1840A)



BRUSHLESS MOTOR



203 Nm / 18V
DS201

(without charger nor battery)
CORDLESS IMPACT DRIVER

Brushless motor.
3 speeds selection (for more precision).
Automatic shut-off function, reducing the risk of overloading and material damage.
Circular LED strips at the tip for better visibility of the work area.

THE PERKS :
- LED STRIPS
- 3 SPEEDS

€139 D


ALSO AVAILABLE IN HARDCASE

DS201A

€429 D

CORDLESS IMPACT DRIVER SET

- 1x Cordless Impact Driver (DS201)
- 2x 5Ah batteries (DB1850P)
- 1x charger (DC1840A)

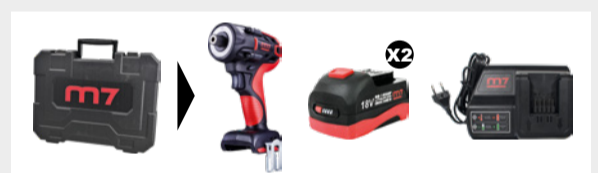

	Battery power	Drilling capacity	Chuck diameter	Bolt size	Blows frequency	Tightening control	Max. Torque	Free speed	Weight
	Ah - V	mm	mm	mm	Blows per minutes		Nm	R.P.M	kg
					bpm				
DD101	5 Ah - 18 V	Wood : 60 Metal : 13	13	-	-	23+1	90	0 - 500 0 - 2000	1.37
DH101	5 Ah - 18 V	Wood : 60 Metal : 13	13	-	0 - 6500 0 - 24000	25	90	0 - 450 0 - 1750	1.45
DS201	5 Ah - 18 V	-	6	M12	0 - 1200 0 - 2350 0 - 3300	-	203	0 - 1100 0 - 1900 0 - 2800	1.28

It's **NEW!**
AVAILABLE EARLY SEPTEMBER

BRUSHLESS MOTOR

18V
DRH101K

(without charger nor battery)
CORDLESS ROTARY HAMMER

Brushless motor
3 Modes : Drill, Drill + Hammer & Chisel.
Perfect choice for drilling and chiseling concrete, wood or steel.
SDS plus Quick-Change Chuck.
Automatic stop of the rotation when you release the trigger
LED to illuminate the work area.
1 side handle.

€185 D



ALSO AVAILABLE IN HARDCASE

DRH101A

CORDLESS ROTARY HAMMER SET

- 1 Cordless rotary hammer
- 2x 5Ah batteries (DB1850P - black version)
- 1x charger (DC1840A)
- 1x side handle

€460 D



	Battery power	Vitesse de rotation	Blows frequency	Impact Energy	Chuck Type	Drilling capacity	Sound level	Vibration level	Weight
	Ah - V	R.P.M	Blows per minutes	joules		mm	dBA	ms ⁻²	kg
			bpm	(J)					
DRH101K	5 Ah - 18 V	1150	5100	2.6	SDS plus	Wood : 30 mm Steel : 13 mm Concrete : 26 mm	94.3	12.7	2.4



It's **NEW!**
AVAILABLE EARLY OCTOBER

18V DOM101

(without charger nor battery)
CORDLESS OSCILLATING MULTI-TOOL

Brushless motor
The oscillating multi-tool is offering a large versatility for the following uses :
- Ideal for the sawing and the cutting of wood, steel, plastic or plasterboard.
- Useful for scraping silicone, tile joints, paint or adhesive.
- Suitable for sanding narrow spaces such corners.
Anti-Vibration System for a more comfortable work
LED to illuminate the work area.
Fast replacement Blade without tool.
Speed variator: 6 speeds.
Oscillation angle : 1.8° right & left.

BRUSHLESS MOTOR

ALSO AVAILABLE IN HARDCASE

DOM101A1
CORDLESS OSCILLATING MULTI-TOOL SET WITH ACCESSORIES

- 1x Multi-tool (DOM101)
- 1x battery 5Ah (DB1850P- black version)
- 1x charger (DC1840A)
- 1x sanding pad
- 1x bi-metal blade
- 1x shovel blade
- 1x semicircle HSS blade
- 7x sanding paper #60
- 7x sanding paper #120
- 7x sanding paper #180



€199 D

€419 D



	Battery power	Strokes per minute	Oscillation angle	Length (without battery)	Sound level	Vibration level	Weight
	Ah - V	S.P.M	degrees	mm	dB(A)	m/s ²	kg
DOM101	5 Ah - 18 V	11000/18000	1.8	320	80.6	1.9	1.04




ACCESSORIES



QK131K3
BI-METAL BLADE - 10 PCS

€12 B



QK131K4
SHOVEL BLADE - 10 PCS

€11 B



QK131K5
SANDING PAD - 10 PCS

€13.50 B



QK131K6
SEMICIRCLE HSS BLADE - 10 PCS

€33 B



QB9933V06K
SANDING PAPER #60 - 10 PCS

€8 B



QB9933V10K
SANDING PAPER #100 - 10 PCS

€8 B

Ø125mm / 3mm 18V DOS501

(without charger nor battery)
CORDLESS ORBITAL SANDER

Compatible abrasive disc: 8-hole velcro paper Ø 125 mm.
Speed variator: 6 speeds.
Dust collection bag.
The speed trigger allows to adapt the speed to the type of surface or the work that needs to be done.
Soft start function.
Ergonomic handle for more confort and control.



SPEED VARIATOR



Consumables not available

€129 D

ALSO AVAILABLE IN SET

DOS501AB
CORDLESS ORBITAL SANDER SET

- 1 orbital sander (DOS501)
- 1 dust collection bag
- 2 5Ah batteries (DB1850P)
- 1 charger (DC1840A)
- 1 Fabric tool box (BA80129)

€419 D



	Battery power	Disc diameter	Free speed	Orbit	Length	Weight
	Ah - V	mm	R.P.M	mm	mm	kg
DOS501	5 Ah - 18 V	125	7000 - 11000	3.0	300	1.23



BRUSHLESS MOTOR

18V DRS101

(without charger nor battery)
CORDLESS RECIPROCATING SAW ONLY

Brushless.
Electric brake quickly stops the blade rotation when the trigger is released. LED work light with pre-light and afterglow.
Bevel Gear Drive System.
Tool-less Blade Change.
Variable-Speed Trigger Switch.
Adjustable shoe length and inclination.
Selector Lever: straight cutting action / orbital cutting action.
This reciprocating saw has the option of orbit action to make the blade swing slightly as it cuts, for a maximum cutting efficiency.

€229 D

Consumables not available

	Battery power	Cutting capacities	Stroke length	Strokes per minute	Length	Weight
	Ah - V	mm	mm	S.P.M	mm	kg
DRS101	5 Ah - 18 V	Wood : 200 Metal : 20	29	3100	410	2.7
DRS102	5 Ah - 18 V	Wood : 160 Metal : 16	25	3100	336	1.78

ACCESSORIES

QD9209

€29 B

VARIABLE PITCH SABER SAW
BLADES - 5 PCS

Teeth per inch : 10/14 TPI
Blades design to cut steel, metal and wood.
Cutting capacity for wood with nails, plywood, plastic tube, carbon: from 3.2 mm to 6.35 mm.
Cutting capacity for other materials (excluding metal): from 3.2 mm to 12.7 mm.



It's **NEW!**

BRUSHLESS MOTOR

THE PERKS :
- 1 HAND WORK
- COMPACT : 336MM (W/O BATTERY)
- LIGHT : 1,78KG

18V DRS102

(without charger nor battery)
CORDLESS COMPACT RECIPROCATING SAW

Brushless motor
Electric brake quickly stops the blade rotation when the trigger is released
LED work light with pre-light and afterglow
Safety locking button
Tool-less Blade Change

€179 D

Consumables not available



ALSO AVAILABLE IN SET

DRS102AB

CORDLESS COMPACT RECIPROCATING SAW SET

- 1 Cordless Compact Reciprocating Saw (DRS102)
- 2 5Ah batteries (DB1850P)
- 1 Charger (DC1840A)
- 1 Fabric tool box (BA80129)

€469 D



Ø125mm / 18V

DG585

(without charger nor battery)
CORDLESS ANGLE GRINDER
The protection casing can be adjusted easily and without tools.
Axis locking button to change the disc easily.
2 positions handle.
On/off button, choice between continuous grinding or jolt grinding.

€123 D



ALSO AVAILABLE IN HARDCASE

Consumables not available

DG585502A

CORDLESS ANGLE GRINDER SET

- 1 Cordless angle grinder (DG585)
- 1 adjustable protection casing
- 1 side handle
- 2 5Ah batteries (DB1850)
- 1 charger (DC1840A)

€413 D



	Battery power	Disc diameter	Thread	Free speed	Length	Weight
	Ah - V	mm	mm	R.P.M	mm	kg
DG585	5 Ah - 18 V	125	M14	8000	285	1.46
DG501	5 Ah - 18 V	125	M14 x P2.0	8000	285	1.48

Ø125mm / 18V

DG501

(without charger nor battery)
CORDLESS ANGLE GRINDER
Spindle lock button for easy disc change.
2-position on/off switch button (continuous on or "dead man's").
Speed variator: 6 speeds.
3 positions handle.
The protection casing can be adjusted easily and without tools.
The brushless motor heats less, is more efficient and lasts longer.
The brushless motor is electronically managed, which improves the responsiveness of the Angle grinder when starting and stopping.

€189 D

BRUSHLESS MOTOR

THE PERKS :
- DEAD MAN SAFETY
- 6-SPEED VARIATOR



SPEED VARIATOR

ALSO AVAILABLE IN HARDCASE

Consumables not available


DG501A

CORDLESS ANGLE GRINDER SET

- 1 Cordless angle grinder (DG501)
- 1 adjustable protection casing
- 1 side handle
- 2 5Ah batteries (DB1850P)
- 1 charger (DC1840A)

€479 D



 Cutting angle until 45°



18V DJS101

(without charger nor battery)
CORDLESS JIG SAW

Speed variator trigger for precise speed control.
Electric brake quickly stops the blade rotation when the trigger is released.
Compatible with "T" and "U" shank Jigsaw blades (not included).
Adjustable base beveling from 0 - 45 degrees (left/right).
4-Position orbital action for smooth cutting in a variety of materials.
LED to illuminate the work area.
Ideal for sawing wood, aluminum and steel.
Storage of the blades in the base of the saw.

€139 D

ALSO AVAILABLE IN SET

Consumables not available


DJS101AB

CORDLESS JIGSAW SET
• 1 Cordless jig saw (DJS101)
• 2 5Ah batteries (DB1850P)
• 1 Charger (DC1840A)
• 1 Fabric tool box (BA80129)

€439 D



 185 MM

 Cutting angle 45° or 90°



BRUSHLESS MOTOR

18V DCS101

(without charger nor battery)
CORDLESS CIRCULAR SAW

Heavy duty, light and durable aluminum base.
Ergonomic design with soft grip handles for comfort and control.
Electric brake quickly stops the blade rotation when the trigger is released.
LED to illuminate the work area.

€264 D

ALSO AVAILABLE IN SET

Consumables not available

DCS101AB

CORDLESS CIRCULAR SAW SET
• 1 Cordless circular saw (DCS101)
• 2 5Ah batteries (DB1850P)
• 1 Charger (DC1840A)
• 1 Fabric tool box (BA80129)

€554 D



	Battery power	Free speed	Shank Opening	Spindle size	Capacité de coupe	Cutting Capacity 45°	Cutting Capacity 90°	Bevel Capacity	Strokes per minute	Stroke length	Length	Weight
	Ah - V	RPM	mm	mm	mm	mm	mm	degrees	S.P.M	mm	mm	kg
DJS101	5 Ah - 18 V	-	-	-	Wood : 63.5 Aluminium : 9.53 Steel : 6.35	45°	90°	-	2200	-	226	2.7
DCS101	5 Ah - 18 V	4500	185	20	-	46	60.5	0 - 56	-	25.4	330	3.63

It's NEW!
AVAILABLE EARLY OCTOBER

18V DR102K

(without charger nor battery)
CORDLESS RIVET GUN

Supplied with O-ring to hold the rivet.
Nozzles included : 2.4mm, 3.2mm, 4.0mm, 4.8mm, 6.4mm.
Compatible with aluminium, steel, stainless rivets from 2,4 mm to 6,4 mm.
Battery Life : 1 full charge battery for 100 rivets.
LED to illuminate the work area.

€539 D



Consumables not available

	Battery power	Capacity	Traction	Stroke length	Weight
	Ah - V	mm	Nm	mm	kg
DR102K	5 Ah - 18 V	2,4 - 6,4	2000	27	0.63

ALSO AVAILABLE IN HARDCASE

DR102A1

CORDLESS RIVET GUN SET
• 1x rivet gun (DR102K)
• 1x battery (DB1850P)
• 1x charger (DC1840A)

€699 D



RIVETER	MATERIAL		RIVET DIAMETER (ØMM)					
RÉFÉRENCE M7	RIVET	MANDRIN	(2.5) 2.4	(3.0) 3.2	4.0	(5.0) 4.8	6.4	8.0
DR102K	aluminum aluminum steel stainless	aluminum steel steel stainless						

It's
NEW!
AVAILABLE EARLY SEPTEMBER



18V
DGG102K

(without charger nor battery)

CORDLESS GREASE GUN

Compatible with standard 400g grease cartridge : DIN1284 & Lube-Shuttle
Overpressure protection included
LCD screen to control battery level.
Provided with 1 meter flexible hose & 73 cm strap.

€195 D

Consumables not available

	Battery power	Length (without battery)	Air pressure	Max. output flow	Cartridge capacity	Weight
	Ah - V	mm	Bar	ml / min	g	kg
DGG102K	5 Ah - 18 V	395	482	94,6	400	2,4

ALSO AVAILABLE IN HARDCASE

DGG102A1

CORDLESS GREASE GUN SET

- 1x grease gun (DGG102K)
- 1x battery 5 Ah(DB1850P)
- 1x charger (DC1840A)
- 1x 1 meter flexible hose
- 1x 73 cm strap

€349 D



It's
NEW!
AVAILABLE EARLY OCTOBER

18V
DHG101

(without charger nor battery)

CORDLESS HEAT GUN

- 60 seconds up to max. temperature
- Stable temperature (Overheat prevention)
- Quick release collar to safely and easily remove nozzle accessories
- Lock-off feature prevents accidental start up ensuring safety to the user
- LED to illuminate work area
- Including 3 nozzles (reflector nozzle, flat nozzle and reduction nozzle)
- Application: Shrinking, Bending tube, Removing Stickers and more...



€98 D

	Battery power	Air Flow	Max. Temperature	Length	Weight
	Ah - V	L / min	°C	mm	kg
DHG101	5 Ah - 18 V	200	550	220	0,63

580 lm / 18V
DFL101

(without charger nor battery)

CORDLESS LED FLOODLIGHT

- 360° Cordless LED Floodlight
- 3 Light Modes:
 - 180° : 450 Lumens (18 hours)
 - 360° Low Light : 550 lumens (20 hours)
 - 360° Max power : 850 lumens (10 hours)

€69 D



	Battery power	Sizes (without battery)	Brightness	Color temperature	Battery life	Weight
	Ah - V	mm	lm	kelvin	hours	kg
DFL101	5 Ah - 18 V	75 x 270 x 80	450 / 550 / 850	3800 - 4000	10 - 20	0,44



ACCESSORIES

DHG901

HEAT GUN NOZZLES - 3 PCS

Reflector nozzle, flat nozzle and reduction nozzle
Material : Aluminium



€14.50 B

18V - 5Ah

18V - 5Ah

18V - 5Ah

18V - 5Ah

18V - 5Ah

THE PACKS **m7**

3/4" AND 1/2"

5Ah / 18V

M7PACKV1

POWERTOOL PACK WITH 1/2" COMPACT IMPACT WRENCH AND 3/4" IMPACT WRENCH

- Content: DW601A delivered in a case, with two DB1850P batteries and 1 DC1840A charger. DW401 delivered in cardboard box without battery or charger.

€899 D



1/2"

5Ah / 18V

M7PACKV2

POWERTOOL PACK WITH 1/2" COMPACT IMPACT WRENCH AND ANGLE GRINDER

- Content: DW401A delivered in a case, with two DB1850P batteries and 1 DC1840A charger. DG585 delivered in cardboard box without battery or charger.

€516 D



3/4" AND 1/2"

5Ah / 18V

M7PACKV3

POWER TOOL PACK WITH 1/2" COMPACT IMPACT WRENCH, 3/4" IMPACT WRENCH AND ANGLE GRINDER

- Content: DW601A delivered in a case, with two DB1850P batteries and 1 DC1840A charger. DW401 and DG585 delivered in cardboard box without battery or charger.

€1009 D



1/2"

5Ah / 18V

M7PACKV6

POWERTOOL PACK WITH 1/2" IMPACT WRENCH, DRILL DRIVER AND ANGLE GRINDER

- Content: DW18502A delivered in a case, with two DB1850P batteries and 1 DC1840A charger. DD101 and DG585 delivered in cardboard box without battery or charger.

€781 D



18V - 5Ah

18V - 5Ah

18V - 5Ah

18V - 5Ah

18V - 5Ah



52Nm / 1.3Ah
DD18132A

CORDLESS SCREWDRIVER DRILL

- 2 Li-Ion 1.3Ah 20V batteries
- 1 charger included.
- 13mm ROHM chuck (self-tightening and self-locking).
- 23 release positions.

Please contact your retailer to get a quotation for these items.



67Nm / 1.3Ah
DH18132A

CORDLESS HAMMER DRILL

- 2 Li-Ion 1.3Ah 20V batteries
- 1 charger included.
- 13mm ROHM chuck (self-tightening and self-locking).
- 24 release positions.

Please contact your retailer to get a quotation for these items.



67Nm / 2.6Ah
DH18262A

CORDLESS HAMMER DRILL

- 2 Li-Ion 2.6Ah 20V batteries
- 1 charger included.
- 13mm ROHM chuck (self-tightening and self-locking).
- 24 release positions.

Please contact your retailer to get a quotation for these items.

	Battery power	Chuck diameter	Max. Torque	Free speed	Length	Weight
	Ah - V	mm	Nm	R.P.M	mm	kg
DD18132A	1.3Ah - 20V	13	52	Low 0~350 / High 0~1300	230	2.5
DH18132A	1.3Ah - 20V	13	67	Low 0~350 / High 0~1300	270	2.5
DH18262A	2.6Ah - 20V	13	67	Low 0~350 / High 0~1300	270	2.5

2Ah / 1 kg
DS10202

CORDLESS IMPACT DRIVER

- Quick charge takes 30 minutes
- 2 batteries included
- LED to light up the work area

€179 D



2Ah
DB1020

BATTERY

Suitable for DS10202

€55 D



DC10A
BATTERY CHARGER

For Battery DB1020

€40 D




	Battery power	Chuck diameter	Chuck size	Bolt size	Max. Torque	Free speed	Blows frequency	Length	Weight
	Ah - V	mm	mm	mm	Nm	R.P.M	Blows per minutes	mm	kg
DS10202	2 Ah - 12 V	-	1/4"	4 ~ 12	100	0~2200	0~3000	-	1.0



Ø230mm / 2100W
AG92103A

ELECTRIC GRINDER

Please contact your retailer to get a quotation for these items.

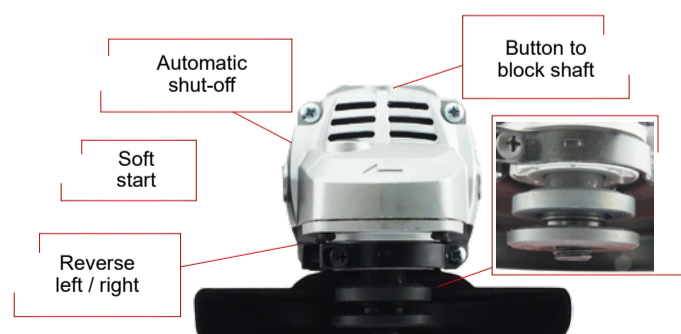

	Disc diameter	Power	Free speed	Cable	Bore	Length	Weight
	mm	W	RPM	Inch	Ø	mm	kg
AG92103A	230 mm	2100	6 000	4	22,23	490	6.5



BOOST

It's
NEW!

ST3100L
ST6400

P.14
P.14



1 YEAR WARRANTY!



6/12 V - 4A
BC1204

BATTERY CHARGER

- Electronic, digital, multi-stage charging and maintenance charger.
- Battery type selection: Lead (Wet, Gel, Efb, Agm) /Lithium (LiFePO4).
- Protection against polarity reversal and short circuits.
- Digital backlit display
- Fixing hook.
- Ergonomic Design.

€68

D

1 YEAR WARRANTY!



12 V - 8A
BC1208

BATTERY CHARGER

- Electronic, digital, multi-stage charging and maintenance charger.
- Battery type selection: Lead (Wet, Gel, Efb, Agm) /Lithium (LiFePO4).
- Charge recovery function
- 13,8V - 5A Power function
- Protection against polarity reversal and short circuits.
- Digital backlit display
- Fixing hook.
- Ergonomic Design

€109

D



	Voltage (DC)	Power supply voltage	Frequency	Rated current	Charging and testing stages	Charge capacity	Maintenance capacity	IP degree of protection	Size	Weight
	V - mAh	V	Hz	A		Ah	Ah		mm	Kg
BC1204	6 / 12 V	220 - 240	50 - 60	1 - 4	8	4 - 80	4 - 120	IP65	190 x 80 x 50	0.75
BC1208	12 V	220 - 240	50 - 60	2 - 8	9	5 - 160	5 - 250	IP65	230 x 100 x 65	1

MINI BOOSTERS

1 YEAR WARRANTY!

12V - 18000mAh
ST450

MULTIFUNCTION MINI BOOSTER

- Crocodile clips for vehicle starting (car, motorbike, small boat, etc.)
- The ST450 can start a vehicle up to 30 times. It depends on the vehicle's engine.
- Intelligent battery clamp : low voltage protection, reverse polarity protection, short circuit protection, reverse charging protection, automatic power shut off
- Powerbank function: charges all of your portable devices (smartphone, laptop PC, tablet, camera, portable games console, etc.)
- 3-mode LED torch : continuous, flashing and SOS
- LCD display indicates the charge level
- 2 USB ports (5V) for charging 2 devices simultaneously
- Protective storage case
- Build-in Type-C fast charge
- A full charge will take between 3-5 hours
- Can be charged from the mains or the cigarette lighter

€130

B

	Voltage (DC)	Peak amps	Dimensions	Size	Weight
	V - mAh	A	A	mm	Kg
ST450	12V - 18000mAh	450	900	191x83x34	1.3



1 YEAR WARRANTY!

It's **NEW!**



Cable length **114cm**

**12V - 25Ah
ST3100**

€339 D

**12V - 25Ah
ST3100L**

€356 D

START BOOSTER

Designed for professional interventions and repairs
High-performance, pure lead AGM battery
Colored LEDs indicating the booster's charge level
Protection against voltage surges
Integrated safety fuse
Insulated, brass-made, curved, durable and resistant pliers
ABS housing, lightweight and impact resistant
1 self-regulating automatic charger (220 V) supplied
Number of batteries: 1
Fuse on the positive clamp: 500A



1 YEAR WARRANTY!

**12/24V - 2x25Ah
ST6200**

€796 D

START BOOSTER

High-performance, pure lead AGM battery
Designed for professional interventions and repairs
Perfect to start trucks, agricultural machinery, public works machinery, which require very high starting power in the event of battery failure
Digital voltmeter indicating the booster's charge level
Protection against voltage surges
Large insulated, brass-made, durable and resistant pliers
ABS housing, lightweight and impact resistant
Integrated safety fuse
12 V / 24 V / OFF switch
Reverse polarity alarm
1 self-regulating automatic charger (220 V) supplied
Number of batteries: 2
Fuse on the positive clamp: 500A



It's **NEW!**



1 YEAR WARRANTY!

**12/24V - 2x25Ah
ST6400**

€1 289 D

START BOOSTER

High-performance, pure lead AGM battery
Designed for professional interventions and repairs
Perfect to start trucks, agricultural machinery, public works machinery, which require very high starting power in the event of battery failure
Digital voltmeter indicating the booster's charge level
Protection against voltage surges
Large insulated, brass-made, durable and resistant pliers
ABS housing, lightweight and impact resistant
Integrated safety fuse
12 V / 24 V / OFF switch
Reverse polarity alarm
1 self-regulating automatic charger supplied
Number of batteries: 2
Fuse on the positive clamp: 500A

1 YEAR WARRANTY!



**12V - 22Ah
ST950**

€389 D

START BOOSTER

- Solid electrolyte lead-acid battery (AGM), watertight, in compliance with I.A.T.A safety standards.
- Built-in short-circuit fuse in the red clamp protects the booster battery and the vehicle.
- Extremely supple start cables of optimum length.
- Digital rectangular back-lit voltmeter shows the charge level at a glance.
- Completely insulated brass clip and super flexible multicore copper cables.
- Protection against power surges.
- ON/OFF button.
- Can be stored and used in all positions.
- Crocodile clip length: 165mm.
- Clip opening: 30mm.
- Negative polarity indicator.
- 12V and 20V outlet.



1 YEAR WARRANTY!



**12V
STC1800**

€999 D

START BOOSTER WITH A SUPER-CAPACITOR

- Meets IATA safety standards
- Entirely insulated brass clips
- 160 cm ultra-supple starter cables, made from multi-strand copper
- Negative polarity indicator
- Built-in short-circuit fuse in the red clamp protects the booster battery and the vehicle.

SUPERCAPACITOR ADVANTAGES :

The booster recharges automatically in a few seconds, as soon as the vehicle has been jump started
Does not contain a battery. This eliminates not only the problem of recharging between 2 jump starts but also problems related to low temperatures
Reliable and durable
Light



• Voltmeter on a LCD backlit screen

SUPERCAPACITOR BATTERY-LESS TECHNOLOGY
> Back to back jump starts without stopping !
> Ideal for breakdown recovery

	Voltage (DC)	Cable length	Clamps length	Cranking amps	Peak amps	Dimensions	Weight	Poids
	V - Ah	cm	mm	mm ²	A	A	mm	kg
ST3100	12V - 25Ah	40	175	-	1200	3100	260 x 120 x 330	10.8
ST3100L	12V - 25Ah	114	175	-	1200	3100	260 x 120 x 330	10.8
ST6200	12/24V - 2x25Ah	145	200	-	2400 / 1200	6200 / 3100	310 x 210 x 440	23.5
ST6400	12/24V - 2x25Ah	182	150	-	2540 / 1270	6400 / 3200	360 x 160 x 420	39
ST950	12V - 22Ah	93	-	25	950	2500	335 x 163 x 415	11.5
STC1800	12V	160	-	25	1800	9000	335 x 163 x 415	9.8




AIR

It's
NEW!


NC4299QMB
QA688
QB135X
QEHSS2510
SC371C
SC435
JC602


P.17
P.23
P.24
P.28
P.30
P.30
P.32



 Air exhaust
direction

 Quiet
model

 Light product

 **Mg**
Magnesium Light product
(magnesium)

TIP: DON'T FORGET TO OIL YOUR IMPACT WRENCH REGULARLY, OR USE A M7 OILER (P.37)



3/8" ★★ 102 Nm
Rocking Dog



NC3410
"BUTTERFLY"
IMPACT WRENCH

€116 B

3/8" ★★ 474 Nm
Twin Hammer



NC3210
COMPACT
IMPACT WRENCH

€237 B

1/2" ★★ 813 Nm
Pin Clutch



NC4130
IMPACT WRENCH

€213 B



Oil bath



1/2" ★★ 900 Nm
Jumbo Hammer



NC4650
COMPACT
IMPACT WRENCH

€209 B



ALSO AVAILABLE IN SET

ALSO AVAILABLE IN HARDCASE

1/2" ○ ★★ 900 Nm
Jumbo Hammer



NC4650MA
IMPACT WRENCH SET WITH
MINI SOCKETS - 8 PCS

- 1x 1/2" impact wrench (NC4650)
- 6x mini hex sockets:
13, 17, 19, 21, 22, 24mm
- 1x 1/4" male thread coupling

€229 B



1/2" ○ ★★ 900 Nm
Jumbo Hammer



NC4650KIT
METRIC IMPACT SOCKET SET WITH
ACCESSORIES - 11 PCS

- 1x 1/2" impact wrench (NC4650)
- 7x standard hex impact sockets:
13, 17, 19, 21, 22, 24, 27 mm
- 1x 125mm extension bar
- 1x 1/4" oiler
- 1x 1/4" male thread coupling

€309 B

kg 3.91 kg

1/2" ★★ 610 Nm
Twin Hammer



NC4630
COMPACT
IMPACT WRENCH

€204 B

LIMITED
QUANTITY!

1/2" ★★ 542 Nm
Twin Hammer



NC4238A
IMPACT WRENCH

€102 B

SPRING-LOADED BLADES



The springs reduce the passage of impurities that could block the rotation of the rotor blades

- ▶▶▶ Optimal performance, even with low pressure.
- ▶▶▶ Reduced air consumption.
- ▶▶▶ Increased service life and performance.



Pin Less



Rocking dog



Twin Dog



Twin Hammer



New Twin Hammer



Pin Clutch



Jumbo Hammer

1/2" **★★★** **Mg** 1627 Nm
Twin Hammer

NC4255QA
COMPOSITE
IMPACT WRENCH



7 spring-loaded blades

€246 B

ALSO AVAILABLE IN HARDCASE

1/2" **★★★** 1627 Nm
Twin Hammer

NC4255QKIT

METRIC IMPACT SOCKET SET WITH
ACCESSORIES - 11 PCS

- 1x 1/2" impact wrench (NC4255QA)
- 7x standard hex impact sockets:
13, 17, 19, 21, 22, 24, 27 mm
- 1x 125mm extension bar
- 1x 1/4" oiler
- 1x 1/4" male thread coupling

€339 B



kg 4.26 kg

1/2" **★★★** 542 Nm
Jumbo Hammer

NC498
COMPACT
IMPACT WRENCH



€259 B

ALSO AVAILABLE IN SET

1/2" **★★★** 542 Nm

NC498MA

IMPACT WRENCH SET
WITH MINI SOCKETS -
8 PCS

- 1x 1/2" impact wrench (NC498)
- 6x mini hex sockets:
13, 17, 19, 21, 22, 24mm
- 1x 1/4" male thread coupling

€310 B



1/2" **★★★** 746 Nm
Twin Hammer

NC4232QA
COMPACT
IMPACT WRENCH



€235 B

1/2" **★★★** 1152 Nm
Twin Hammer

NC4233A
COMPOSITE
IMPACT WRENCH



€238 B

ALSO AVAILABLE IN HARDCASE

1/2" **★★★** 1152 Nm
Twin Hammer

NC4233QKIT

METRIC IMPACT SOCKET SET WITH
ACCESSORIES - 11 PCS

- 1x 1/2" impact wrench (NC4233A)
- 7x standard hex impact sockets:
13, 17, 19, 21, 22, 24, 27 mm
- 1x 125mm extension bar
- 1x 1/4" oiler
- 1x 1/4" male thread coupling

€329 B



kg 4.75 kg

1/2" **★★★** 1088 Nm
Twin Hammer

NC4299Q
COMPOSITE
IMPACT WRENCH



€167 B

ALSO AVAILABLE IN SET

It's
NEW!

1/2"

★★★ 1088 Nm

Twin Hammer

NC4299QMB
IMPACT WRENCH
AND SOCKET SET - 13PCS

- 1x 1/2" impact wrench (NC4299Q)
- 1x 6 pts impact socket set:
10, 11, 13, 17, 19, 22, 24, 27, 29, 30, 32 mm
- 1x 1/4" male thread coupling

€219 B



1/2" **★★★** 1356 Nm
Twin Hammer

NC4236A
IMPACT WRENCH



€324 B

	Square drive	Bolt size	Torque range	Max. torque	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	Inch	mm	Nm	Nm	R.P.M	L/min	bar	mm	kg	Inch	Inch	dBA	m/s ²
NC3410	3/8"	10	7-68	102	10 000	71	6.3	159	0.8	1/4"	3/8"	92.1	3.6
NC3210	3/8"	13	136-407	474	10 000	113	6.3	142	1.5	1/4"	3/8"	92.1	3.6
NC4130	1/2"	16	244-542	813	9 000	127	6.3	142	1.61	1/4"	3/8"	93.0	1.2
NC4650	1/2"	16	244-542	900	9 000	123	6.3	104	1.4	1/4"	3/8"	95.0	2.4
NC4630	1/2"	16	271-475	610	9 000	124	6.3	97.7	1.5	1/4"	3/8"	96.0	2.8
NC4238A	1/2"	16	150-300	542	7 000	119	6.3	184	2.7	1/4"	3/8"	92.1	3.7
NC4255QA	1/2"	25	271-1085	1627	8 500	136	6.3	179	1.7	1/4"	3/8"	85.0	4.7
NC4232QA	1/2"	16	136-542	746	10 000	113	6.3	120	1.38	1/4"	3/8"	83.0	3.7
NC4233A	1/2"	19	271-678	1152	9 000	132	6.3	190	2.10	1/4"	3/8"	85.0	3.8
NC4299Q	1/2"	M19	204-680	1088	8 500	113	6.3	194	2.1	1/4"	3/8"	85.0	3.2
NC498	1/2"	16	108-405	542	6500	119	6.3	88	1.37	1/4"	3/8"	85.0	2.0
NC4236A	1/2"	25	271-949	1356	7 500	155	6.3	171	2.62	1/4"	3/8"	87.0	4.5

Do not **MISS IT!**



3/4" ★★ 1966 Nm
Twin Hammer

NC6201
COMPOSITE
IMPACT WRENCH

€516 B

3.2 kg

3/4" ★★ Mg 1627 Nm
Twin Hammer



NC6256Q
COMPACT
IMPACT WRENCH

€329 B

3/4" ★★ 2034 Nm
Twin Hammer



NC6218
IMPACT
WRENCH

€829 B

3/4" ★★ 1627 Nm
New Twin Hammer



NC6236
COMPACT
IMPACT WRENCH

€364 B

3/4" ★★ Mg 1762 Nm
Twin Hammer



NC6255Q
COMPOSITE
IMPACT WRENCH



7 spring-loaded blades

€346 B

3/4" ○ ★★ 1762 Nm

NC6255QKIT

METRIC IMPACT SOCKET SET WITH
ACCESSORIES - 11 PCS

- 1x 3/4" impact wrench (NC6255Q)
- 7x standard hex impact sockets:
24, 27, 30, 32, 33, 34, 36 mm
- 1x 175mm extension bar
- 1x 1/4" oiler
- 1x 1/4" male thread coupling

€525 B

ALSO AVAILABLE IN HARDCASE



7.49 kg



3/4" ★★ Mg 2034 Nm




6 spring-loaded blades

NC6266
COMPOSITE
IMPACT WRENCH


€619 B



Pin Less



Rocking dog



Twin Dog




Twin Hammer



New Twin
Hammer



Pin Clutch



Jumbo Hammer

1" **Mg 3118 Nm**
Twin Hammer

NC8266P
COMPOSITE
IMPACT WRENCH

6 spring-loaded blades



NC8266P
Short anvil version: 256 mm

€919 B

NC8266P6
Long anvil version: 408 mm

€976 B

1" **Mg 3118 Nm**
Twin Hammer

NC8266S
COMPOSITE
IMPACT WRENCH

6 spring-loaded blades



NC8266S
Short anvil version: 430 mm

€919 B

NC8266S6
Long anvil version: 580 mm

€976 B



1" **Mg 3390 Nm**
Twin Hammer

NC8332
IMPACT
WRENCH



NC8332
Short anvil version: 372.6 mm

€974 B

NC83326
Long anvil version: 525 mm

€995 B

1" **Mg 2441 Nm**
Pin Less

NC8343
IMPACT
WRENCH



NC8343
Short anvil version: 381 mm

€399 B

NC83438
Long anvil version: 590 mm

€399 B

	Square drive	Bolt size	Torque range	Max. torque	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	Inch	mm	Nm	Nm	R.P.M	L/min	bar	mm	kg	Inch	Inch	dBA	m/s ²
NC6201	3/4"	30	271-2034	1966	5700	181	6.3	222	3.2	3/8"	1/2"	5.9	3.2
NC6218	3/4"	27	271-1898	2034	6 000	182	6.3	320	5.7	1/2"	1/2"	106.0	3.3
NC6236	3/4"	25	271-1220	1627	7 500	155	6.3	171	2.68	1/4"	1/2"	87.0	4.5
NC6255Q	3/4"	25	271-1491	1762	8 500	136	6.3	198	1.9	1/4"	3/8"	85.0	4.7
NC6256Q	3/4"	23	203-1220	1627	7 000	144	6.3	145	1.9	3/8"	1/2"	85.0	2.8
NC6266	3/4"	25	271-1760	2034	6 000	169	6.3	205	2.95	3/8"	1/2"	88.0	5.9
NC8266P	1"	35	271-2710	3118	4500	254	6.3	256	5.90	1/2"	1/2"	92.0	6.1
NC8266P6	1"	35	271-2710	3118	4500	254	6.3	408	6.30	1/2"	1/2"	92.0	6.1
NC8266S	1"	35	272-2448	3128	4500	212	6.3	430	6.0	1/2"	1/2"	92.0	6.1
NC8266S6	1"	35	272-2448	3128	4500	212	6.3	580	7.2	1/2"	1/2"	92.0	6.1
NC8332	1"	33	271-2710	3390	4000	226.5	6.3	372.6	9.4	1/2"	3/8"	103	8.2
NC83326	1"	33	271-2710	3390	4000	226.5	6.3	525	10.6	1/2"	3/8"	103	8.2
NC8343	1"	33	271-2170	2441	3 900	325	6.3	381	12.56	1/2"	1/2"	103	6.3
NC83438	1"	33	271-2170	2441	3 900	325	6.3	590	13.9	1/2"	1/2"	103	6.3

1/4" OR 3/8" ★★ 30 Nm

NE_51
PNEUMATIC RATCHET



NE251
1/4" version


€109 B

NE351
3/8" version

€109 B

1/4" ★★ 30 Nm

NE2905 €217 B
EXTENDED AIR RATCHET WRENCH 390 MM

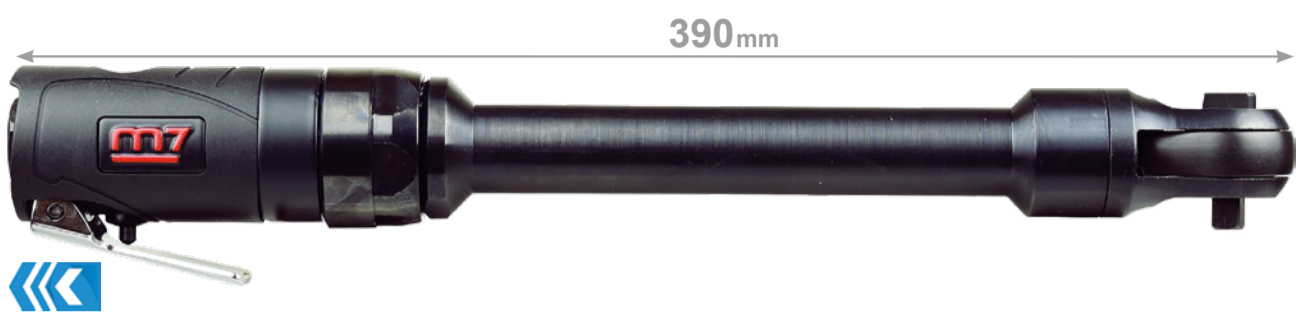

1/4" OR 3/8" ★★ 50 Nm

NE_61
PNEUMATIC RATCHET



NE261
1/4" version

€114 B

NE361
3/8" version

€114 B

1/2" ○ ★★ 135 Nm

NE0413
PNEUMATIC RATCHET SET WITH ACCESSORIES - 13 PCS

- 1x 1/2" pneumatic ratchet (NE461)
- 8x hex sockets: 8 - 9 - 10 - 12 - 13 - 14 - 17 - 19mm
- 1x 75mm extension bar
- 2x 1/2" and 3/8" adaptor
- 1x 1/4" male thread coupling

€335 B



2.90 kg


3/8" ★★ 47.6 Nm

NE3803 €109 B
PNEUMATIC RATCHET



1/2" ★★ 68 Nm

NE421 €109 B
PNEUMATIC RATCHET

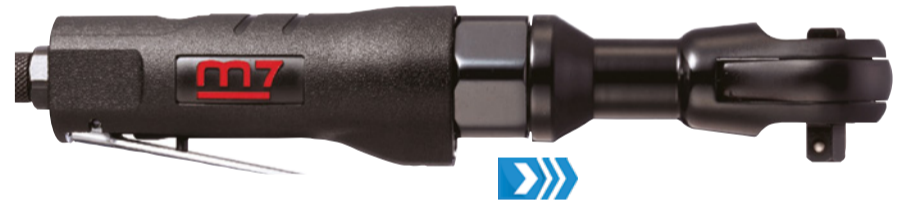


1/2" ★★ 95 Nm

NE4305 €189 B
EXTENDED AIR RATCHET WRENCH 390 MM



1/2" ★★ 81 Nm

NE432MA €124 B
PNEUMATIC RATCHET

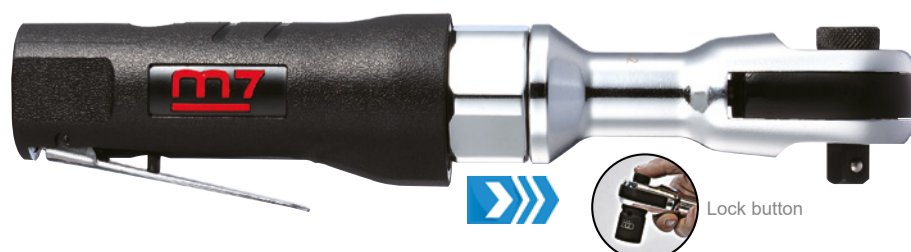

1/2" ★★ 109 Nm

NE4808 €123 B

PNEUMATIC RATCHET



1/2" ★★ 204 Nm

NE4815A €180 B

PNEUMATIC RATCHET



1/2" ★★ 135 Nm

NE483 €145 B

PNEUMATIC RATCHET



ALSO AVAILABLE IN SET

1/2" ○ ★★ 135 Nm

NE483MA €164 B

PNEUMATIC RATCHET WITH SOCKETS - 8 PCS

- 1x 1/2" Pneumatic ratchet (NE483)
- 6x 1/2" hex sockets: 13 - 17 - 19 - 21 - 22 - 24mm
- 1/4" male thread coupling



1/2" ★★ 68 Nm

NE4901

"NO REACTION" PNEUMATIC RATCHET



"No reaction" - anti-backlash

€178 B

1/2" ★★ 339 Nm

NE499

PNEUMATIC RATCHET



€346 B



5 IN 1

IN THE SET

NE0405KIT

PAGE 25

DISCOVER THE RATCHET NE9004

	Square drive	Torque range	Max torque	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	Inch	Nm	Nm	R.P.M	L/min	bar	mm	kg	Inch	Inch	dBA	m/s ²
NE251	1/4"	6.7-20	30	350	84.96	6.3	125	0.5	1/4"	3/8"	89	4.4
NE351	3/8"	6.7-20	30	350	84.96	6.3	125	0.5	1/4"	3/8"	89	4.4
NE2905	1/4"	7-20	30	300	85	6.3	290	0.84	1/4"	3/8"	89	4.4
NE261	1/4"	13.5-47	50	230	130	6.3	160	0.5	1/4"	3/8"	88	3
NE361	3/8"	13.5-47	50	230	130	6.3	160	0.5	1/4"	3/8"	88	3
NE3803	3/8"	6.8-20.4	46.7	300	102	6.3	220	0.63	1/4"	3/8"	92.0	3.2
NE421	1/2"	13.5-47	68	160	113.28	6.3	265	1.04	1/4"	3/8"	92.8	4.6
NE4305	1/2"	20-75	95	160	67.0	6.3	390	1.63	1/4"	3/8"	82	1.2
NE432MA	1/2"	13.5-61	81	160	113	6.3	265	1.22	1/4"	3/8"	89.8	5.2
NE4808	1/2"	13.5-54	109	150	127.4	6.3	275	1.26	1/4"	3/8"	95	3.9
NE4815A	1/2"	54.4-163	204	170	136	6.3	313	1.54	1/4"	3/8"	93	2.5
NE483	1/2"	13.5-61	135	250	141	6.3	277	1.28	1/4"	3/8"	85	2.5
NE4901	1/2"	13.5-54	68	1100	85	6.3	159	0.67	1/4"	3/8"	89	2.2
NE499	1/2"	68-203	339	7 500	69.4	6.3	340	1.83	1/4"	3/8"	93	9.9



★★★
QA141L €260 B
STRAIGHT DIE GRINDER



★★★
QA163L €283 B
STRAIGHT DIE GRINDER



★★
QA111A €83 B
STRAIGHT DIE GRINDER

★★★
QA0215A
STRAIGHT DIE GRINDER SET
WITH ACCESSORIES - 15 PCS

- 1x grinder (QA211A)
- 1x collet 3mm (1/8") and 6mm (1/4")
- 2x flat spanners for dismantling
- 5x grindstones (3mm - 1/8"): W145 - W153 - W163 - W170 - W176
- 5x grindstones (6mm - 1/4"): W220 - W187 - A22 - A12 - A5
- 1x Male thread coupling

€127 B



kg 1.30



★★
QA211A €95 B
STRAIGHT DIE GRINDER


ALSO AVAILABLE IN HARDCASE



★★★
QA311A €128 B
STRAIGHT DIE GRINDER



★★★
QA313A €139 B
STRAIGHT DIE GRINDER

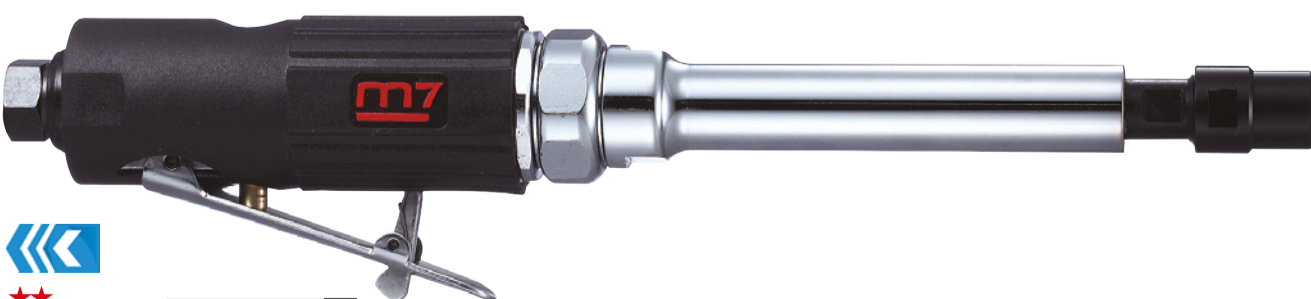

★★★
QA315 €155 B
STRAIGHT DIE GRINDER

ACCESSORIES

3mm
QB9211 €5 B
GRINDSTONES FOR DIE GRINDER
• Grindstones on a 3mm stem:
W145 - W153 - W163 - W170 - W176



6mm
QB9213 €8 B
GRINDSTONES FOR DIE GRINDER
• Grindstones on a 6mm stem:
W220 - W187 - A22 - A12 - A5





★★★
QA611A €114 B
90° ANGLE GRINDER



Power regulator
★★★
QA688A €180 B
AIR DIE GRINDER FLEX-HEAD

It's
NEW!
AVAILABLE EARLY AUGUST!



TILTING HEAD



★★★
QA6205 €158 B
LONG ANGLE GRINDER

MINI TOOLS



QA101
MINI STRAIGHT
DIE GRINDER
€91 B



QA601
MINI 90° ANGLE
GRINDER
€113 B



3,50 kg
€465 B
QE624QA04

- MINI DRILL AND GRINDER SET
- 4 PCS
- 1x mini straight grinder 2500RPM (QA101)
 - 1x mini angle grinder 2200RPM(QA601)
 - 1x mini straight drill 6500RPM (QE924) ⌀28
 - 1x mini angle drill 5000RPM (QE624) ⌀28

	Collet size	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm	R.P.M	L/min	bar	mm	HP	kg	Inch	Inch	dB(A)	m/s ²
QA141L	6	24 000	396	6.3	170	0.4	0.6	1/4"	3/8"	75	2.5
QA163L	6	16 000	141	6.3	350	0.9	1.31	1/4"	3/8"	75	2.8
QA111A	6 & 3	25 000	283	6.3	155	0.3	0.38	1/4"	3/8"	81.5	1.8
QA211A	6 & 3	20 000	283	6.3	190	0.9	0.65	1/4"	3/8"	75.7	0.8
QA311A	6 & 3	25 000	283	6.3	190	0.3	0.48	1/4"	3/8"	81.5	1.8
QA313A	6 & 3	25 000	283	6.3	235	0.3	0.58	1/4"	3/8"	81.5	1.8
QA315	6 & 3	25 000	283	6.3	280	0.3	0.63	1/4"	3/8"	81.5	1.8
QA611A	6 & 3	19 000	283	6.3	160	0.3	0.51	1/4"	3/8"	74.4	1.7
QA6205	6	14 500	99.1	6.3	308	0.5	0.95	1/4"	3/8"	-	-
QA688	6 & 3	20 000	101	6.3	178	0.3	0.65	1/4"	3/8"	80	1.1
QA101	6 & 3	25 000	178	6.3	119	0.3	0.32	1/4"	3/8"	80	1.4
QA601	6 & 3	22 000	283	6.3	120	0.3	0.44	1/4"	3/8"	84	1.1

PNEUMATIC MICRO DIE GRINDERS



★★★
QA412
MICRO DIE
GRINDER
€193 B



★★★
QA421
MICRO DIE
GRINDER
€178 B



★★★
QA432
MICRO DIE
GRINDER
€148 B



★★★
QA511
ENGRAVING PEN
€109 B

	Collet size	Free speed	Blows frequency	Air consumption	Air pressure	Length	Hose length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm	R.P.M	Blows per minutes	L/min	bar	mm	mm	kg	Inch	Inch	dB(A)	m/s ²
QA412	3	60 000	-	76	6.3	170	1 500	0.24	1/4"	3/8"	70	0.5
QA421	3	60 000	-	76	6.3	150	1 500	0.22	1/4"	3/8"	70	0.5
QA432	3	70 000	-	29	6.3	137	1 425	0.20	1/4"	3/8"	70	0.5
QA511	-	-	13 000	29	6.3	140	1 420	0.23	1/4"	3/8"	78	0.6





★★
★★
Ø125mm
QB105 €235 B
ANGLE GRINDER WITH ROLL
TYPE THROTTLE



★★
★★
Ø125mm
QB125 €229 B
ANGLE GRINDER COMPOSIT WITH
LEVER TYPE THROTTLE



★★
★★
Ø125mm
QB7115M €299 B
ANGLE GRINDER
WITH LEVER TYPE THROTTLE

Disc-lock button. Adjustable side exhaust to send air in the desired direction.



It's
NEW!

★★
★★
Ø125mm
QB135X €188 B
ANGLE GRINDER
WITH LEVER TYPE THROTTLE



	Disc diameter	Bore	Thread	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm (Inch)	mm		R.P.M	L/min	bar	mm	HP	kg	Inch	Inch	dBA	m/s²
QB105	125 (5")	22	3/8"-24	11 000	170	6.3	226	0.78	1.81	1/4"	3/8"	87.1	1.2
QB125	125 (5")	22	5/8"-11	11 000	170	6.3	230	0.8	1.78	1/4"	3/8"	87	1.2
QB135X	125 (5")	22	M14*P2.0	11 000	170	6.3	230	0.78	1.81	1/4"	3/8"	87.8	1.2
QB7115M	125 (5")	22	M14*P2.0	11 000	119	6.3	232	1.3	1.80	1/4"	3/8"	90	1.2

Consumables not available

ACCESSORIES

125mm QB905
125MM (5") GRINDING DISC
For QB105 / QB115 / QB125 / QB7115
Bore: 22mm
Thickness: 6mm
167g



€3.60 B

PNEUMATIC ANGLE GRINDERS



★★
★★
Ø75mm
QC213 €93 B
GRINDER



★★
★★
Ø75mm
QC253 €129 B
GRINDER



ACCESSORIES

75mm QB913
75MM (3") CUT-OFF WHEEL
For QC213 / QC253
Bore: 10mm - Thickness: 1.5mm - 10g



€2 B

100mm QB914
100MM (5") CUT-OFF WHEEL
For QB105 / QB115 / QB125 / QB7115
Bore: 22mm - Thickness: 6mm - 36g



€3.30 B

	Disc diameter	Thread	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm (Inch)	mm	R.P.M	L/min	bar	mm	HP	kg	Inch	Inch	dBA	m/s²
QC213	75 (3")	10	20 000	283	6.3	200	0.9	0.86	1/4"	3/8"	80.2	10.8
QC253	75 (3")	-	24 000	113	6.3	203	0.6	0.8	1/4"	3/8"	91.0	1.2

Consumables not available

☆☆ 10mm
QB311
BELT SANDER

€159 B

☆☆ 20mm
QB312
BELT SANDER

€289 B

☆☆☆
QB325N

BELT SANDER SET
Belt speed controller
Non-woven abraded belt available
Ergonomic design for comfortable use

€348 B



ACCESSORIES

QB91108
10 SANDING BELTS

For QB311
10 x 330 mm 80 g

€12 B

QB91110
10 SANDING BELTS

For QB311
10 x 330 mm 100 g

€12 B

QB91208
10 SANDING BELTS

For QB312
20 x 520 mm 80 g

€16 B

QB91210
10 SANDING BELTS

For QB312
20 x 520 mm 100 g

€15 B

QB910606
10 SANDING BELTS

For QB325
6 x 330 mm 60 g

€12 B

QB910608
10 SANDING BELTS

For QB325
6 x 330 mm 80 g

€12 B

QB910610
10 SANDING BELTS

For QB325
6 x 330 mm 100 g

€11 B

QB91106
10 SANDING BELTS

For QB325
10 x 330 mm 60 g

€12 B

QB912006
10 SANDING BELTS

For QB325
20 x 330 mm 60 g

€18 B

QB912008
10 SANDING BELTS

For QB325
20 x 330 mm 80 g

€16 B

QB912010
10 SANDING BELTS

For QB325
20 x 330 mm 100 g

€15 B

QB91206
10 SANDING BELTS

For QB325
20 x 520 mm 60 g

€20 B

	Belt size	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm	R.P.M	L/min	bar	mm	kg	Inch	Inch	dBA	m/s ²
QB311	10x330	16 000	226	6.3	290	0.8	1/4"	3/8"	89.7	0.5
QB312	20x520	16 000	254	6.3	360	1.2	1/4"	3/8"	91.8	0.4
QB325N	6x330 - 10x330 - 20x330 - 20x520	16 000	113	6.3	320	2.1	1/4"	3/8"	90.0	1.0

Consumables not available

5-IN-1 SET

☆☆☆ **NE0405KIT**

PNEUMATIC TOOL SET - 5 PCS

Quick-head-change system

kg 4,30 kg

€439 B



20000 R.P.M
QA9120
STRAIGHT DIE GRINDER
Ø 6 & 3 MM

14000 R.P.M
QB9903
STRAIGHT DIE GRINDER
Ø 75 MM

81 Nm
NE9004
1/2" AIR RATCHET WRENCH

2500 R.P.M
QE2132
STRAIGHT DRILL
Ø 10 MM (3/8")

14000 R.P.M
QA9620
90° ANGLE GRINDER
Ø 6 & 3 MM

	Max. torque	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Sound level	Vibration level	
	Nm	R.P.M	L/min	bar	mm	HP	kg	Inch	dBA	m/s ²	
NE9004	1/2"	81	150	141	6.3	287	-	1.48	1/4"	82	5.2
QE2132	10mm (3/8")	-	2500	141	6.3	248	-	1.1	1/4"	82	1.5
QA9120	6 & 3mm	-	20 000	141	6.3	202	0.5	0.73	1/4"	82	3.5
QB9903	75mm (3")	-	14 000	141	6.3	211	0.5	0.9	1/4"	82	3.5
QA9620	6 & 3mm	-	14 000	141	6.3	208	0.5	0.9	1/4"	82	3.5



★★★
 Ø152mm
 5mm
QB45602
 VACUUM RANDOM ORBITAL SANDER

€232 B



★★★
 Ø152mm
 5mm
QB54602
 VACUUM RANDOM ORBITAL SANDER

€188 B



★★★
 Ø152mm
 5mm
QB47602
 VACUUM RANDOM ORBITAL SANDER
 With central vacuum and suction hose

€249 B



	Disc diameter	Number of holes	Orbit	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm (Inch)		mm	R.P.M	L/min	bar	mm	hp	kg	Inch	Inch	dBA	m/s ²
QB45602	152 (6")	6	5	10 000	109	6.3	193	0.24	0.84	1/4"	3/8"	81.6	7.1
QB54602	152 (6")	6	5	10 000	85	6.3	210	0.24	0.78	1/4"	3/8"	81.6	7.1
QB47602	152 (6")	6	5	10 000	109	6.3	193	0.24	1.13	1/4"	3/8"	84.7	7.1

Consumables not available

ACCESSORIES

QB9327
 SANDING DISC FOR Ø152 MM (6") ORBITAL SANDER
 15 holes



€25 B



★★★
 Ø76mm
QP113
 MINI SANDER

€163 B

ALSO AVAILABLE IN SET



★★★
 Ø76mm
QP123
 MINI POLISHER

€169 B

ALSO AVAILABLE IN SET

★★★ **QP123AQP04**

POLYCARBONATE HEADLIGHT RENOVATION FOAM SET WITH SANDER AND POLISHER - 8 PCS

- 1x mini sander 15000RPM (QP113)
- 1x mini polisher 2100RPM (QP123)
- 2x 1/4" male thread coupling
- 1x hard polishing pad (QB9403)
- 1x medium polishing pad (QB9413)
- 2x tightening spanners

€368 B



2,33 kg



★★★
 Ø30mm
 3mm
QP111
 MINI ANGLE SANDER

€148 B

ACCESSORIES



QB9403
 POLISHER PAD
 Hard/rough 3" (75mm)
 For QP113

€8.80 B



QB9413
 POLISHER PAD
 Medium 3" (75mm)
 For QP123

€8.80 B



QB9303
 SANDING PAD (MALE)
 Velcro pad (3" - 75mm)
 For QP113 & QP123

€13 B



QB9323F
 SANDING PAD (FEMALE)
 Velcro pad (3" - 75mm)
 For QP113 & QP123


€19 B

	Thread	Disc diameter	Orbit	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	Vibration level
	Inch	mm (Inch)	mm	R.P.M	L/min	bar	mm	hp	kg	Inch	Inch	dBA	m/s ²
QP113	5/16"-24	76 (3")	2.5	15 000	99	6.3	127	0.4	0.72	1/4"	3/8"	74	0.3
QP123	7/16"-20	76 (3")	-	2 100	99	6.3	135	0.4	0.77	1/4"	3/8"	74	0.3
QP111	M10xP1.5	30	3	8 000	152	6.3	160	0.3	0.55	1/4"	3/8"	89	0.3



☆☆☆
 Ø75mm
 Ø113mm
 Ø125mm
QP215
 REVOLVER SANDER
 "3 DISCS"
€114 B

ACCESSORIES



QP215T26
 DISCS
 FOR QP215
€10.60 B



☆☆☆
 Ø178mm
QP317
 BUFFER
€279 B

ACCESSORIES

QB9507
 BUFFING PAD
 For QP317



€34 B

	Thread	Disc diameter	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	Vibration level
	Inch	mm (Inch)	R.P.M	L/min	bar	mm	HP	kg	Inch	Inch	dBA	m/s ²
QP215	7/16"-20	75-113-125	16000	184	6.3	160	0.8	1.20	1/4"	3/8"	60	1.8
QP317	5/8"-11	178	2500	169	6.3	406	1	2.04	1/4"	3/8"	84	2.0

☆☆☆ **12 Nm**
RA101A
 STRAIGHT
 SCREWDRIVER
 Twin Dog
€87 B




☆☆☆ **13.5 Nm**
RA301
 ADJUSTABLE
 SCREWDRIVER
 Adjustable Clutch
€145 B




☆☆☆ **16.3 Nm**
RA302
 ADJUSTABLE
 SCREWDRIVER
 Adjustable Clutch
€164 B




	Hex drive	Torque range	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	Inch (mm)	Nm	R.P.M	L/min	bar	mm	kg	Inch	Inch	dBA	m/s ²
RA101A	1/4" (6.35)	5-12	9 000	170	6.3	166	0.6	1/4"	3/8"	85.7	2.2
RA301	1/4" (6.35)	5-13.5	1 800	170	6.3	190	1.1	1/4"	3/8"	95.3	4.2
RA302	1/4" (6.35)	5-16.3	800	170	6.3	226	1.3	1/4"	3/8"	96.5	2.2

PNEUMATIC SCREWDRIVERS







Twin Dog




Self-tapping screws for plastic / wood




Adjustable Clutch



Self-tapping screws for thick material / sheet metal



Positive Clutch



Screws for wood



★★★
1800RPM
QE331
REVERSIBLE DRILL WITH
KEYLESS CHUCK

€103 B



★★★
2200RPM
QE332
DRILL WITH
KEYLESS CHUCK

€92 B



★★★
800RPM
QE341
REVERSIBLE DRILL WITH
KEYLESS CHUCK

€167 B



★★★
1600RPM
QE633
ANGLE DRILL
WITH KEYLESS CHUCK

€175 B



★★★
2800RPM
QE532
KEYLESS
CHUCK DRILL

€316 B



★★★
2200RPM
QE432
KEYLESS
CHUCK DRILL

€155 B

MINI TOOLS



QE924
MINI STRAIGHT DRILL

€126 B



QE624
MINI 90° ANGLED
DRILL

€148 B



QE624QA04

- MINI DRILL AND GRINDER SET - 4 PCS
- 1x mini straight grinder 2500RPM (QA101) 23
 - 1x mini angle grinder 2200RPM(QA601) 23
 - 1x mini straight drill 6500RPM (QE924)
 - 1x mini angle drill 5000RPM (QE624)

€465 B

3,50 kg

ACCESSORIES



288 g

QEHSS2510

- DRILL BIT SET - 10 PCS.
Manufactured from high hardness HSS for easier and faster drilling.
• Drill bits: 1.5 to 5.5 mm (+ 0.5 mm)

€12 B

It's
NEW!

Chuck diameter	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	Vibration level	
mm	R.P.M	L/min	bar	mm	HP	kg	Inch	Inch	dBA	m/s ²	
QE331	10 (3/8")	1 800	184	6.3	203	0.65	1.1	1/4"	3/8"	96.5	0.3
QE332	10 (3/8")	2 200	184	6.3	190	0.60	1	1/4"	3/8"	96.5	0.3
QE341	13 (1/2")	800	184	6.3	230	0.65	1.8	1/4"	3/8"	96.5	0.1
QE633	10 (3/8")	1600	85	6.3	209	0.50	1.1	1/4"	3/8"	72	2.5
QE532	10 (3/8")	2800	135	6.3	243	0.70	1.23	1/4"	3/8"	90	2.0
QE432	10 (3/8")	2200	135	6.3	226	0.70	1.18	1/4"	3/8"	90.0	3.0
QE924	6	6500	229	6.3	146	0.3	0.55	1/4"	3/8"	77	1.2
QE624	6	5000	220	6.3	143	0.3	0.67	1/4"	3/8"	82	1.2

! PLEASE CONSULT THE RIVETER SPECIFICATIONS CHART BEFORE YOUR PURCHASE.



★★★ **PA201**
RIVETER
Hydropneumatic system

€399 B

★★★ **PA301**
RIVETER
Hydropneumatic system


€173 B

★★★ **PA203N**
RIVETER

Hydropneumatic system
Alloy steel jaws.
Cylinder and piston with chrome finish to limit friction and allow rivets to be released quickly.
360° use.
Designed for intensive use.

€229 B

	Capacity	Stroke length	Traction	Air consumption	Air pressure	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm	mm	kg-f	L/cycle	bar	kg	Inch	Inch	dBA	m/s ²
PA201	2.4~6.4	14	1603	2.32	6.3	1.8	1/4"	3/8"	79.7	0.5
PA301	2.4~4.8	16	1045	1.48	6.3	1.5	1/4"	3/8"	79.7	0.3
PA203N	3.2~6.4	16	1200	1.48	6.3	1.5	1/4"	3/8"	79.7	0.5

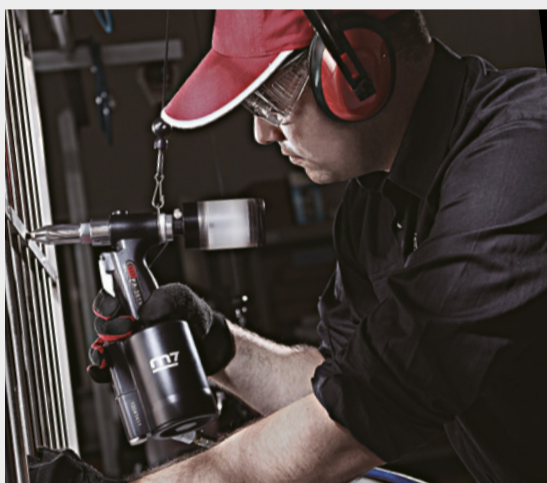

SPECIFICATIONS

RIVETER	MATERIAL	RIVET DIAMETER (ØMM)						
		(2.5)	(3.0)	4.0	(5.0)	6.4	8.0	
RÉFÉRENCE M7	RIVET	MANDRIN	2.4	3.2	4.8	5.0	6.4	8.0
PA201	aluminum	aluminum						
	aluminum	steel						
	steel	steel						
PA203N	aluminum	aluminum						
	aluminum	steel						
	steel	steel						
PA301	aluminum	aluminum						
	aluminum	steel						
	steel	steel						

PNEUMATIC INSERT RIVETERS



★★★ **PB2402**
INSERT RIVETER
Hydropneumatic system

€669 B



★★★ **PB1305**
INSERT RIVETER
Gear motor

Capacity M3, M4, M5

€539 B

Capacity M8, M10

€499 B

Capacity M6, M8

€499 B

ACCESSORIES

PB1308T01

M6 ADAPTER
for PB1305, PB1310

€100 B



PB9006
INSERT RIVET ADAPTOR
FOR SCREWDRIVER

€59 B

The perk : compatible with the M7 Power tools Range !

	Capacity	Minimum force	Stroke length	Traction	Air consumption	Air pressure	Free speed	Dimensions	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm	Nm	mm	kg-f	L/cycle	bar	R.P.M	mm	kg	Inch	Inch	dBA	m/s ²
PB2402	Steel M4-M10 Stainless M4-M8	-	9	1650	1.5	6.3	-	-	1.55	1/4"	3/8"	82	0.8
PB1305	M3 - M4 - M5	-	-	-	7.8	6.3	1 200	-	1.1	1/4"	3/8"	86	1.6
PB1308	M6 - M8	-	-	-	7.8	6.3	600	-	1.3	1/4"	3/8"	86	1.6
PB1310	M8 - M10	-	-	-	7.8	6.3	400	-	1.3	1/4"	3/8"	86	1.6
PB9006	M3 - M4 - M5 - M6	15	-	-	-	-	1 000	59x172	0.28	-	-	-	-



Includes 5 chisels

★★★ ● **SC211C** €105 B

ROUND CHISEL CHIPPING HAMMER
Includes 5 chisels



Includes 5 chisels

★★★ ● **SC221C** €107 B

HEX CHISEL CHIPPING HAMMER
Includes 5 chisels

ALSO AVAILABLE IN HARDCASE



★★★ ● **SC342** €192 B

HEX CHISEL CHIPPING HAMMER



★★★ ■ **SN1032** €172 B

QUICK RELEASE STRAIGHT CHIPPER
1 chisel included

ACCESSORIES



● **SC4101** €6.50 B

FLAT CHISEL
For 10 mm round shanks



● **SC4201** €7 B

FLAT CHISEL
For 10.2 mm hex shanks



● **SC4202** €7 B

SHEET METAL CUTTER
For 10.2 mm hex shanks



● **SC4203** €7 B

PUNCH CHISEL
For 10.2 mm hex shanks



● **SC4204** €7 B

SPOT WELD CHISEL
For 10.2 mm hex shanks



● **SC4205** €8 B

2 EDGE SHEET METAL CUTTER
For 10.2 mm hex shanks



● **SC415MA** €34 B

SET OF ROUND CHISELS
For 10 mm round shanks



● **SC425** €38 B

SET OF HEX CHISELS
For 10.2 mm hex shanks



● **SC435** €65 B

SET OF 5 RIVET CHISELS
For 10 mm round shanks


It's **NEW!**
AVAILABLE EARLY AUGUST!



Includes 5 chisels

★★★ ● **SC371C** €226 B

ROUND CHISEL CHIPPING HAMMER
Includes 5 chisels

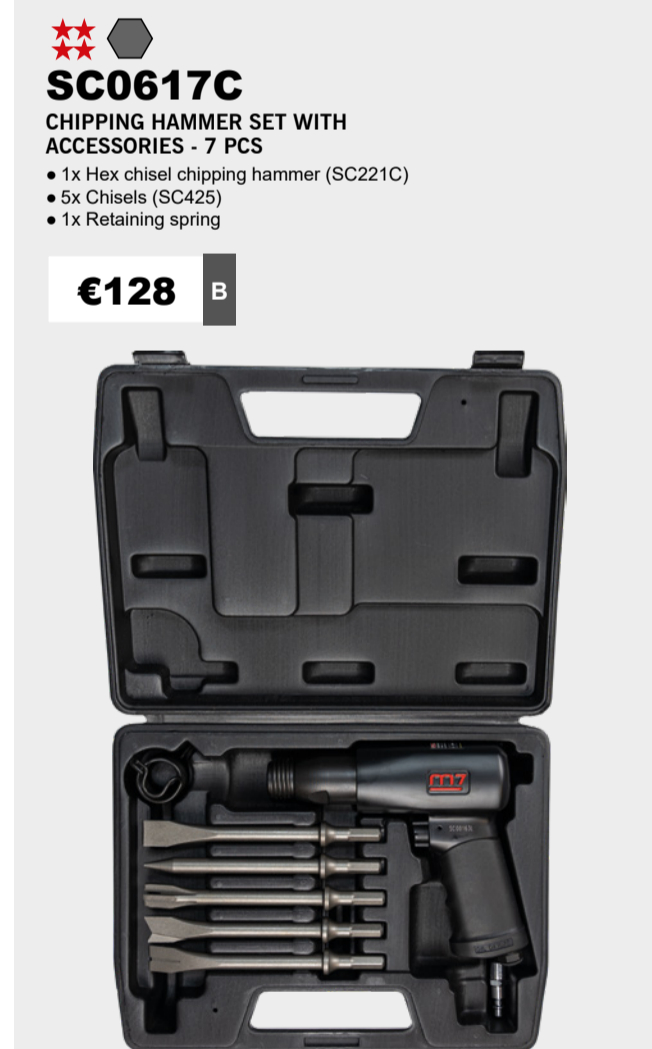

★★★ ● **SC0617C** €128 B

CHIPPING HAMMER SET WITH ACCESSORIES - 7 PCS

- 1x Hex chisel chipping hammer (SC221C)
- 5x Chisels (SC425)
- 1x Retaining spring



	Type of fitting	Shank diameter	Stroke length	Blows frequency	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
		mm	mm	Blows per minutes	L/min	bar	mm	kg	Inch	Inch	dBA	m/s ²
SC221C	●	10	67	3200	113	6.3	175	1.7	1/4"	3/8"	98	12.3
SC342	●	10	92	2200	113	6.3	228	2	1/4"	3/8"	94.7	10.6
SC211C	●	10.2	67	3200	113	6.3	175	1.7	1/4"	3/8"	98	12.3
SC371C	●	10.2	62.5	3000	127	6.3	180	1.7	1/4"	3/8"	95	8.8
SN1032	■	13	33	4000	120	6.3	290	1.33	1/4"	3/8"	91	14.5



★★★
SN1288
NEEDLE SCALER
12 needles.
For hard to reach areas.

€145 B



★★★
SN2110
NEEDLE SCALER
19 needles. Pistol style.
Designed to withstand intense use.
Light and easy to use.

€279 B

ACCESSORIES



SN288
SPARE NEEDLES
For SN1288

€20 B



SN268
SPARE NEEDLES
For SN2110

€26 B

	Needle diameter	Number of needles	Stroke length	Blows per minute	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm		mm	bpm	L/min	bar	mm	kg	Inch	Inch	dBA	m/s ²
SN2110	3x180	19	33	3 700	424	6.3	330	2.8	1/4"	3/8"	97	9.7
SN1288	3x125	12	32	5 500	84.96	6.3	290	1.3	1/4"	3/8"	86	7.6



PNEUMATIC SHEARS AND SAWS



★★★
QD221
STRAIGHT SABRE SAW
Set of 5 files and 2 blades included

€204 B




★★★
QG102 €99 B
STRAIGHT SHEAR



★★★
QD321
STRAIGHT SABRE SAW
Air exhaust designed to reduce vibrations by 30%. Long stroke to optimise efficiency by 20%.

€218 B

((()))
-30%

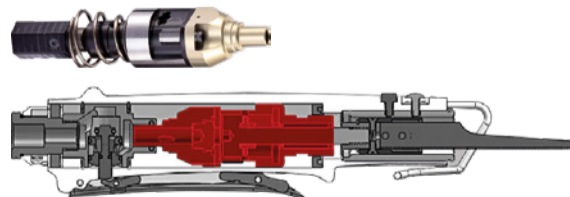

★★★
QG103 €102 B
NIBBLER
Reinforced punch for increased operating life. Die adapted for round cuts. Ø 4.5mm.

	Cutting capacity	Cut length	Strokes per minute	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm	mm	S.P.M	L/min	bar	mm	kg	Inch	Inch	dBA	m/s ²
QD321	-	14.5	11000	113	6.3	230	0.6	1/4"	3/8"	83	2.0
QD221	1.6	10	5000	113	6.3	250	0.8	1/4"	3/8"	81.9	4.1
QG102	Stainless : 1 Steel : 1.2 Aluminium : 1.6	-	2600	170	6.3	254	1	1/4"	3/8"	85.8	2.4
QG103	Steel : 1.2 Aluminium : 1.6	-	2 600	85	6.3	193	1	1/4"	3/8"	88	1.6

ACCESSORIES

- 10 pieces
- Length: 90mm
- HSS blade



QD924
10 SAW BLADES
WITH
24 TEETH

€16 B



QD932
10 SAW BLADES
WITH
32 TEETH

€17 B



267-394mm
JC202
EXPANDABLE BLOWGUN

€18 B




Movable venturi nozzle

JC602
HIGH-FLOW
BLOW GUN

€37 B

It's NEW!

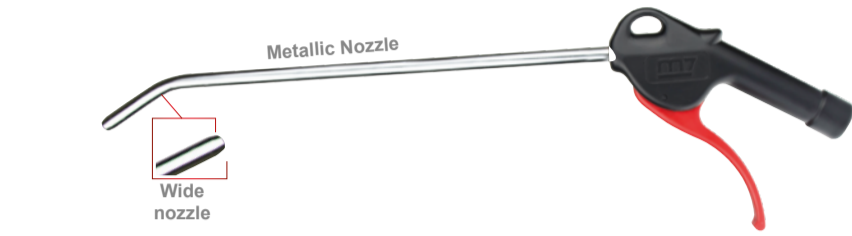

Metallic Nozzle

Wide nozzle

2nd generation
JC4
WIDE NOZZLE PROGRESSIVE BLOWGUN

JC405 125 mm version	JC410 150 mm version	JC412 300 mm version	JC424 600 mm version	JC435 875 mm version
€9 B	€12 B	€13 B	€23 B	€28 B



Aluminium

Fixed venturi nozzle

1M
JC641
ANGLED
BLOWGUN

€60 B



Aluminium

Movable venturi nozzle

Removable extension

2m

1M/2M
JC680
BLOWGUN

1m extension included

€86 B

	Nozzle length	Working pressure	Max. pressure	Air consumption		Net weight	Air inlet	Air hose	Sound level
	mm	bar	bar	L/min	L/min	kg	Inch	Inch	dBA
		Working	MAX						
JC202	267 - 394	6.2-8.5	11.7	-	144	0.22	1/4"	3/8"	90
JC602	50.8	6.2-8.3	15.6	13.0	15.0	0.60	1/4"	3/8"	90
JC405	125	5.3-8.5	10.6	368	425	0.11	1/4"	3/8"	90
JC410	250	5.3-8.5	10.6	368	425	0.12	1/4"	3/8"	90
JC412	300	5.3-8.5	10.6	368	425	0.13	1/4"	3/8"	90
JC424	600	5.3-8.5	10.6	368	425	0.14	1/4"	3/8"	90
JC435	875	5.3-8.5	10.6	368	425	0.25	1/4"	3/8"	90
JC641	1000	5.3-8.5	10.6	368	425	0.34	1/4"	3/8"	90
JC680	2000	5.3-8.5	10.6	368	425	0.64	1/4"	3/8"	90

ACCESSORIES

JC491
SPARE TIPS
Two side holes for air volume control



€5.50 B

! Be careful, once the safety tip is set up, it cannot be withdrawn

LUBRICATION



SG405
GREASE GUN
SG902 adapter included

€76 B



SG407
GREASE GUN
Continuous flow
SG212 flexible hose and SG902 adapter included

€135 B



SG400C
COMPOSITE
GREASE GUN


€79 B

! ONLY WORKING WITH 400 CC GREASE CARTRIDGES

	Working pressure	Max. pressure	Cartridge capacity	Net weight	Air inlet	Air hose	Sound level	Vibration level
	bar	bar	C.C	kg	Inch	Inch	dBA	m/s ²
		MAX						
SG407	2.8 - 8.24	10.5	400	1.6	1/4"	3/8"	74	2
SG405	2.8 - 8.24	10.5	400	1.46	1/4"	3/8"	80.2	0.7
SG400C	2.8 - 8.24	10.5	400	1	1/4"	3/8"	81.4	0.6


ACCESSORIES

SG212
300 mm FLEXIBLE HOSE



€8.80 B

SG902
SCREW-ON TYPE GREASE CARTRIDGE ADAPTOR FOR AIR GREASE GUN
Ø18 mm / Ø31 mm
For SG405 / SG407



€8 B

It's
NEW!

SK1131

P.35





QK111
PNEUMATIC OSCILLATING KNIFE

Blade can be mounted in 12 different ways depending user's needs. Reduced vibrations.

Curved blade included QK2030P

€155 B

	Strokes per minute	Air consumption	Air pressure	Net weight	Air inlet	Air hose	Sound level	Vibration level
	S.P.M	L/min	bar	kg	Inch	Inch	dBA	m/s ²
QK111	20 000	170	6.3	1.1	1/4"	10	75	3.9

ACCESSORIES

18mm QK3018 U-BLADE	36mm QK3036 U-BLADE	36mm QK2036P CURVED U-BLADE	63mm QK2063P U-BLADE
€30 B	€36 B	€29 B	€35 B
90mm QK2090P U-BLADE	48mm QK2030P CURVED BLADE	16.30 x 8mm QK1008 STRAIGHT BLADE	57mm QK1057 STRAIGHT BLADE
€38 B	€12.50 B	€18 B	€18 B



QB802
PNEUMATIC BUFFER

Can be used to remove rust, oxide, tags, stickers, etc. without damaging the paint. Durable, easy to use and does not get hot during operation

€239 B



QB0808M

BUFFER SET WITH ACCESSORIES - 6 PCS

- Pneumatic buffer (QB802)
- Rubber brush
- Scouring wheel
- Straight metal brush
- Hooked metal brush
- 1/4" male thread coupling

€375 B



ALSO AVAILABLE IN HARDCASE

ACCESSORIES

	QB9401 HOOKED METAL BRUSH	€47 B
	QB9411 HOOKED METAL BRUSH	€33 B
	QB9412 STRAIGHT METAL BRUSH	€32 B
	QB9414 RUBBER BRUSH	€19 B
	QB9415 SCOURING WHEEL	€23 B

SR2001KIT

AIR BRUSH KIT

Dual action trigger to control the paint flow. Wall bracket included, allowing you to store the airbrush when it is at rest. Botón de ajuste del flujo de aire. Lightweight and ergonomic body, ideal for one-handed use. Ultra-fine 0.3mm nozzle for high precision.

- 1 1.5m long Air Hose (M5*0.45)
- 1 glazen reservoir van 22 cm³
- 1 50 c.c. Glass Jar
- 1 Airbrush
- 1 Wall bracket
- 1 2c.c. Cup
- 1 adapter M5*0.45 male to 1/4" female
- 1 Spanner
- 1 8c.c Cup

€76 B



SX4101 **€78** B

PNEUMATIC SAND BLASTER (0.6 L)

- Cylindrical nozzle
- Carbon steel S45C nozzle
- Particle Size - Mesh (#) Max.: 80
- Particle Size - Micron (µm) Max.: 177
- Particle Size - (mm) Max.: 0.177

	Nozzle diameter	Capacity	Free speed	Air consumption	Working pressure	Air pressure	Max. pressure	Length	Motor	Net weight	Air hose	Air inlet	Sound level	Vibration level
	mm	cm ³	R.P.M	L/min	bar	bar	bar	mm	HP	kg	Inch	Inch	dBA	m/s ²
QB802	-	-	3600	300	-	6.3	-	200	0.7	1.2	3/8"	-	86	0.3
SR2001KIT	0.3	2 - 8	-	-	-	-	-	-	-	-	1/4"	-	-	-
SX4101	5	600	-	226	6.3 - 8.2	-	13	197	-	0.36	-	1/4"	82	-

1/4"  Rocking Dog



NC0208M

PRE-CALIBRATED IMPACT WRENCH FOR GLOW PLUGS - 9PCS

- 1x impact wrench
- 5x 1/4" deep sockets: 8, 9, 10, 11, 12 mm
- 1x 50mm extension bar
- 1x 1/4" 37mm joint
- 1x 1/4" male thread coupling

1.75 kg

€219 B



WG202N

AIR WONDER GUN KIT - 8 PCS

Used for cleaning or vacuuming dust, wood chips, filings, broken glass, etc. Double function: vacuum and blow gun

- 1 pc Gun
- 1 pc Vacuum tip
- 1 pc Thin tip
- 1 pc Flexible nylon brush tip
- 1 pc Fixed extension
- 1 pc Flexible extension
- 1 pc Textile vacuum bag
- 1 pc Clip
- 1 pc Male thread

€78 B



SQ0104

€97 B

BRAKE CALIPER WIND BACK KIT - 4 PCS

- Pneumatic caliper wind back tool
- Adaptor for SAAB - HONDA - ALFA ROMEO - AUDI - VW - LANCIA
- 3/8" #5 adaptor
- 1/4" Male thread coupling

ALSO AVAILABLE IN HARDCASE



SQ0217

PNEUMATIC BRAKE CALIPER WIND BACK KIT - 17 PCS

- Pneumatic wind back tool
- 16 adaptors for disc brakes (right and left gage)

€193 B



Ø25-110mm

QM1125

PNEUMATIC CVJ BOOT TOOL

For easy fitting of CVJ boots.

Do not use with a pressure exceeding 8.6 bars.

€229 B



SK1010

AIR CAULKING GUN

Progressive trigger, automatic decompression in the stop position. For a simple and precise application of numerous cartridge products: glue, silicon etc.

€49 B

It's **NEW!**
AVAILABLE EARLY SEPTEMBER



SK1131

AIR CAULKING GUN

Progressive trigger, automatic decompression in the stop position. For a simple and precise application of numerous cartridge products: glue, silicon etc.

€172 B



9L

SM0901

FLUID EXTRACTOR

Pneumatic or manual version

For engine oil pans, transmission oil, coolant, power steering fluid, brake fluid, etc. Works with or without air compressor thanks to the integrated manual pump. New safety design: when the tank is full, the air inlet mechanism automatically shuts down. Delivered with 1' main hose (1.30m) + 1 spiral brake hose (1.20m) + 1 secondary hose (1.12m).

⚠ Do not use with flammable liquids.

€269 B



2L

SM0502

FLUID EXTRACTOR 2L

Pneumatic version

For brake fluid. Delivered with a 1L bottle equipped with a locking clamp to easily fill the tank with brake fluid. New safety design: when the tank is full, the air inlet mechanism automatically shuts down. Delivered with 1 main hose (1.30m) + 1 spiral brake hose (1.20m) + 1 secondary hose (1.12m).

⚠ Do not use with flammable liquids.

€237 B



1L

SX2101

CLEANING GUN

Rotating metal nozzle. Equipped with a valve for cleaning and drying. Ideal for removing stains from fabric or carpets, removing grease from bodywork and for cleaning engine blocks, radiators and oil stains.

€139 B

	Square drive	Joint diameter	Max. torque	Reservoir capacity	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	Inch	mm	Nm	L	R.P.M	L/min	bar	mm	kg	Inch	Inch	dB(A)	m/s ²
NC2710	1/4"	-	10 - 40	-	11 000	150	6.3	136	0.8	1/4"	3/8"	91.0	3.4
QM1125	-	25-110	-	-	-	-	6.3-8.6	442	3.25	1/4"	3/8"	-	-
SK1010	-	-	-	300 ml	-	113	3.4 ~ 4.8	305	1.1	1/4"	3/8"	-	-
SK1131	-	-	-	300 - 600 ml	-	113	-	609.6	1.21	1/4"	3/8"	-	-
WG202N	-	-	-	-	-	3.36	6.3	145	0.6	1/4"	3/8"	92	7.5
SX2101	-	-	-	1 L	5 500	56.6	6.3	210x110	0.78	1/4"	3/8"	85	-
SM0502	-	-	-	2 L	-	-	-	350	2.5	-	-	-	-
SM0901	-	-	-	9 L	-	-	-	640	4.7	-	-	-	-



GARAGE



TOOL BAG



BA80129

TOOL BAG

8 inside pockets, 3 outside pockets and 1 net pocket on the outside. Diagonal strap for balance. Opens 100%. Hard rubber base (anti-slip / shock-proof). 40x22x30cm

€21

D

1/4" OR 3/8"

SV2
LUBRICATOR AND REGULATOR FILTER

Can even be filled under pressure.




SV2230
1/4" version

€98 B

SV2330
3/8" version


€98 B

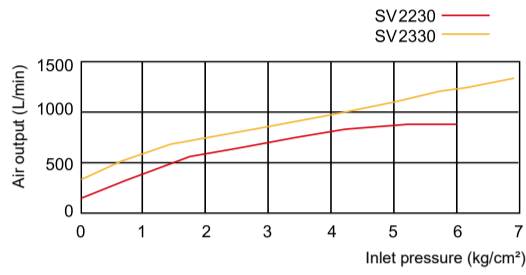

1/2"


SV2431
LUBRICATOR AND REGULATOR FILTER

Can even be filled under pressure.

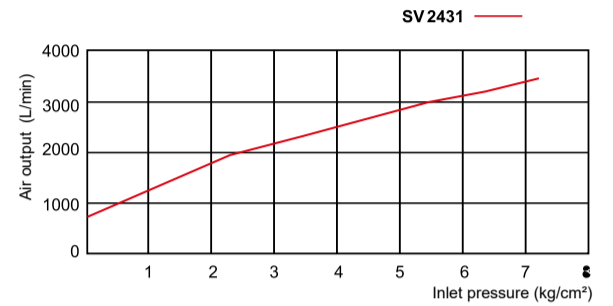

	Max input pressure	Output adjustable air pressure	Air flow	Threads (inlet/outlet)	Temperature range	Filtration	Condensate tank capacity	Oil tank capacity	Weight
	bar	bar	l/min	pouces	°C	µm	ml	ml	kg
SV2230	15	4.8 - 9.6	1100	1/4"	5-60°	5	15	50	0.7
SV2330	15	4.8 - 9.6	1100	3/8"	5-60°	5	15	50	0.7
SV2431	20	4.8 - 9.6	3400	1/2"	5-60°	40	15	80	1.5

RECOMMENDED AIR REGULATION SYSTEM :

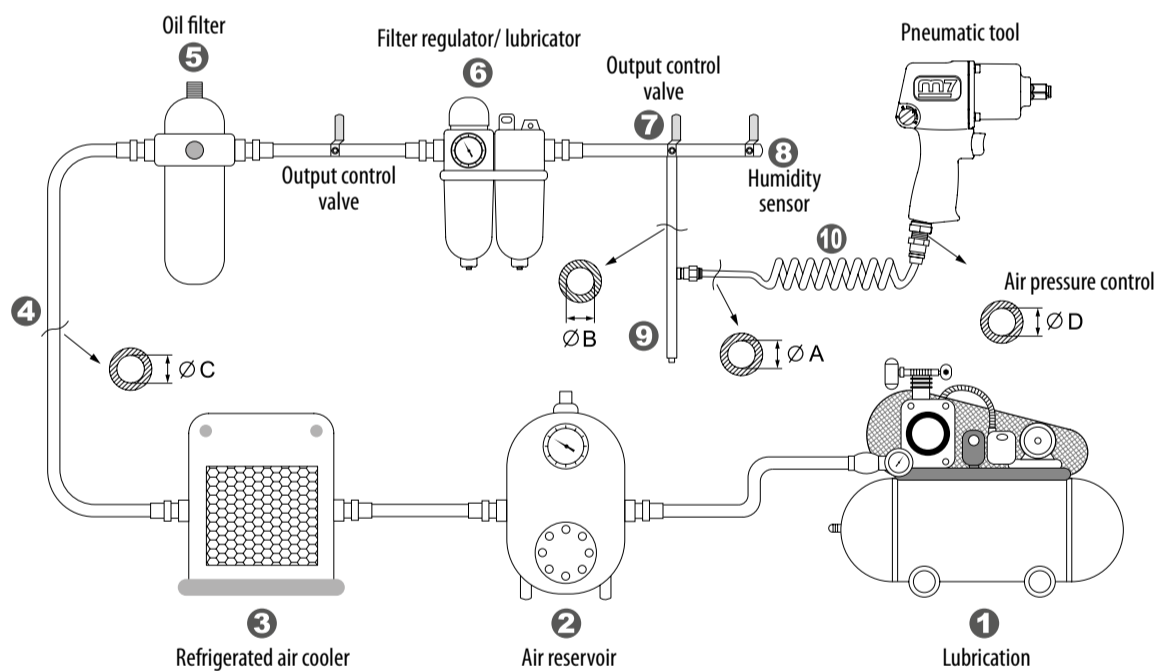

1/4" OR 3/8"



SW1_A
OILER

Air inlet: 1/4". Max. oil content: 8cc. Connect directly to the hose for automatic lubrication.

SW12A
1/4" - 100g version

€7 B

SW13A
3/8" - 130g version

€7.50 B



SG101
LUBRICATION KIT

Injection into lubrication inlet. Working temperature: -20°C to 180°C. Saves on maintenance costs. Stops corrosion of parts. Improves performance. Prolongs tool-life.

€25 B

MAINTENANCE



SGU202

LUBRICATING OIL CAN FOR PNEUMATIC TOOLS

Low pouring point (anti-freeze). Contains extreme-pressure and anti-wear additives. Good protection against corrosion. Optimised demulsification (fast separation in case of pollution by water condensation). Viscosity level at 40°C: 22.

€12 B



SB201
DIGITAL TYRE INFLATOR

Measures from 0 to 12 bars with an accuracy of 0.01 bars.
Clip retainer.
30cm version


€67 B



SB215
DIGITAL TYRE INFLATOR

Measures from 0 to 12 bars with an accuracy of 0.01 bars.
Clip retainer.
150cm version

€65 B

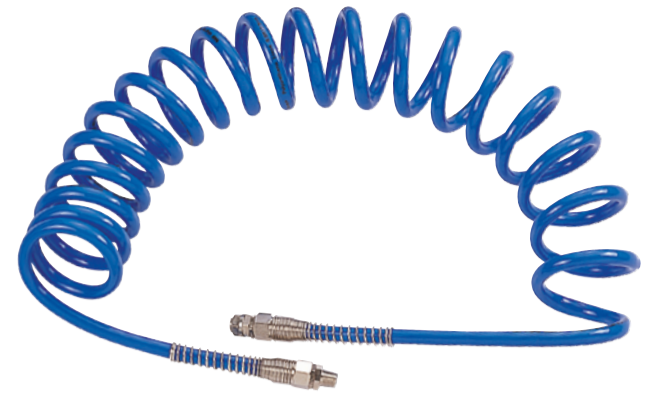

SD2
SPIRAL EXTENSION

Polyurethane

SD23210

10M (5mm) version

€26 B

SD23115

15M (8mm) version

€55 B

SD24415

15M (13mm) version

€72 B

SD23110

10M (8mm) version

€42 B

SD23315

15M (10mm) version

€65 B



1/4" 15M


SA3215A
PNEUMATIC HOSE REEL

€129 D

3/8" 15M

SA3315A
PNEUMATIC HOSE REEL

€129 D

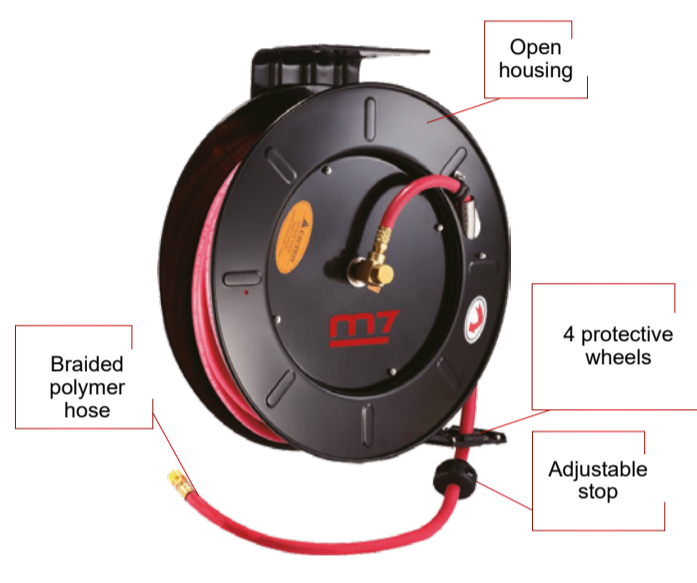

3/8" 20M

SA4320A
PNEUMATIC HOSE REEL

€319 D

1/2" 20M

SA4420A
PNEUMATIC HOSE REEL

€375 D

	Max pressure	Air consumption	Air hose	Internal diameter	External diameter	Hose length	Working pressure	Max. pressure	Male thread	Net weight
	bar	L/min	Inch	mm	mm	M	bar	bar	inch	kg
SB201	11	39	3/8"	-	-	-	6.3	-	1/4"	0.32
SB215	11	39	3/8"	-	-	-	6.3	-	1/4"	0.32
SA3215A	-	-	-	8	12	15	6.3	20	1/4"	5
SA3315A	-	-	-	10	15	15	6.3	20	3/8"	6
SA4320A	-	-	-	10	15	20+1	6.3	20	3/8"	24
SA4420A	-	-	-	13	18	20+1	6.3	20	1/2"	29
SD23210	-	-	-	5	8	10	7	20	1/4"	0.935
SD23110	-	-	-	8	12	10	7	20	1/4"	0.5
SD23115	-	-	-	8	12	15	7	20	1/4"	1.35
SD23315	-	-	-	10	15	15	7	20	3/8"	0.65
SD24415	-	-	-	13	18	15	7	20	1/2"	0.65



SA10_D
ELECTRIC CABLE REEL

SA1015D
15M - 1.5mm² version

€151 D

SA1020D
20M - 1.5mm² version

€180 D

SA1115D
15M - 2.5mm² version

€198 D

	Cable length	Wire cross section	Number of wires	Power	Dimensions	Weight
	M	mm ²		V	mm	kg
SA1015D	15	1.5	3	230	350x180x325	5.8
SA1020D	20	1.5	3	230	350x180x325	5.8
SA1115D	15	2.5	3	230	350x180x325	6.8

CABLE REELS

EXTRACTION CLAWS



SC005

BALL JOINT & TIE-ROD SPLITTER SET - 5 PCS

- Steering ball joint separator - 17mm
- Steering ball joint separator - 23mm
- Pitman arm tool - 28mm
- Air hammer adaptor - 184mm
- Air hammer adaptor Ø 10,2 mm

€49 B

MAGNETIC MOUNT



1/2"

SH1001

MAGNETIC MOUNT FOR AIR TOOLS

Compatible with all 1/2" air impact wrenches (except compact and mini ranges).

€48 B

SPRING BALANCER



5 kg
SP105

SPRING BALANCER

Practical and compact, these balancers have a rotating wheel for easy cable tension setting. Stainless steel housing. Ball locking system to prevent the cable from retracting into the housing.

€78 B

	Lifting capacity	Cable Length	Type	Rope diameter	Net weight
	kg	m		mm	kg
SP105	3-5	1.5	Cable	3.2	0.81



1/2" ○



MA42006M

1/2" METRIC MINI IMPACT SOCKET SET - 6 PCS

- 13 - 17 - 19 - 21 - 22 - 24 mm

0,51 kg

€24 B

1/2" ○



MB42011M

1/2" METRIC IMPACT SOCKET SET - 11 PCS

- 10 - 11 - 13 - 17 - 19 - 22 - 24 - 27 - 29 - 30 - 32 mm

1,87 kg

€59 B

1/2" ○



MB42011M1

1/2" METRIC IMPACT SOCKET SET - 11 PCS

- 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 mm

1,29 kg

€46 B

1/2" ○



MB43015M

1/2" METRIC IMPACT SOCKET SET - 15 PCS

- 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 19 - 21 - 22 - 24 - 27 - 30 - 32 mm

4,26 kg

€105 B

3/4" ○

MB62010M


3/4" METRIC IMPACT SOCKET SET - 10 PCS

- 19 - 22 - 24 - 27 - 30 - 32 - 36 - 38 - 40 - 42 mm


4,90 kg

€129 B



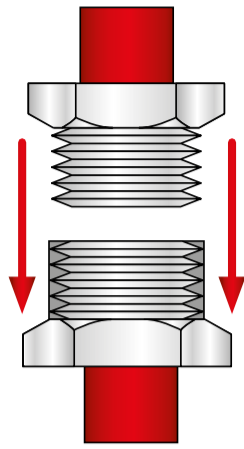

G: THE LETTER G MEANS THAT THE THREAD OR TAPPING IS CYLINDRICALLY SHAPED.
G threads are only compatible with G tapping.

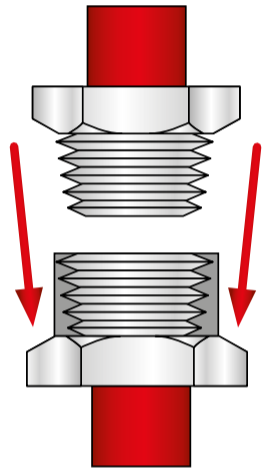

R: THE LETTER R MEANS THAT THE THREAD OR TAPPING IS CONICAL.
R threads are compatible with R and G tapping.

DECOMPRESSION COUPLINGS

Antistatic. Crush-Resistant. Better performance. Light and compact. High output. No "Whiplash" possible ISO 4414. Anti scratch. Flexible connection

M7 REFERENCE	THREAD DIAMETER	TYPE MALE FEMALE	PASSAGE	FOR CONNECTORS	PRICE
SY271F	G 1/4"	F	Ø 6mm	ISO 6150-B	€19.20 B
SY271M	R 1/4"	M	Ø 6mm	ISO 6150-B	€22.70 B
SY372M	R 3/8"	M	Ø 8mm	ISO 6150-B	€29.40 B
SY471F	G 1/2"	F	Ø 8mm	ISO 6150-B	€27.10 B

DECOMPRESSION COUPLINGS

SY200FD	R 1/4"	F	Ø 6mm	ISO 6150-B	€11 B
SY300FD	R 3/8"	F	Ø 6mm	ISO 6150-B	€12 B
SY400FD	R 1/2"	F	Ø 6mm	ISO 6150-B	€12 B
SY200MD	R 1/4"	M	Ø 6mm	ISO 6150-B	€10.30 B
SY300MD	R 3/8"	M	Ø 6mm	ISO 6150-B	€12 B
SY400MD	R 1/2"	M	Ø 6mm	ISO 6150-B	€12 B


STANDARD COUPLINGS

SY1213F	R 1/4"	F	Ø 7.2mm	EURO	€9.10 B
SY1233F			Ø 6mm	ISO 6150-B	€9.10 B
SY1313F	R 3/8"	F	Ø 7.2mm	EURO	€9.60 B
SY1333F			Ø 6mm	ISO 6150-B	€9.60 B
SY1413F	R 1/2"	F	Ø 7.2mm	EURO	€10 B
SY1433F			Ø 6mm	ISO 6150-B	€10 B
SY0213M	R 1/4"	M	Ø 7.2mm	EURO	€8.70 B
SY0233M			Ø 6mm	ISO 6150-B	€8.70 B
SY0313M	R 3/8"	M	Ø 7.2mm	EURO	€9 B
SY0333M			Ø 6mm	ISO 6150-B	€9.60 B
SY0413M	R 1/2"	M	Ø 7.2mm	EURO	€10 B
SY0433M			Ø 6mm	ISO 6150-B	€10 B
SY3213H	Int. Ø for hose 8mm	H	Ø 7.2mm	EURO	€10.70 B
SY3233H			Ø 6mm	ISO 6150-B	€10.70 B
SY3313H	Int. Ø for hose 10mm	H	Ø 7.2mm	EURO	€12 B
SY3333H			Ø 6mm	ISO 6150-B	€12 B
SY3413H	Int. Ø for hose 13mm	H	Ø 7.2mm	EURO	€13 B
SY3433H			Ø 6mm	ISO 6150-B	€13 B

EURO EUROPEAN PROFILE
HIGH OUTPUT
USED ACROSS EUROPE


ISO 6150-B ISO 6150-B PROFILE
STANDARD OUTPUT
USED IN BENELUX, SPAIN, FRANCE, NORWAY AND SWITZERLAND

BRITISH BRITISH PROFILE
STANDARD OUTPUT
USED IN THE UK



G: THE LETTER G MEANS THAT THE THREAD OR TAPPING IS CYLINDRICALLY SHAPED.

G threads are only compatible with G tapping.

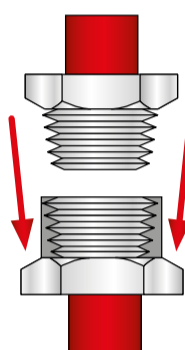

R: THE LETTER R MEANS THAT THE THREAD OR TAPPING IS CONICAL.

R threads are compatible with R and G tapping.

M7 REFERENCE	THREAD DIAMETER	TYPE MALE FEMALE	PASSAGE	FOR CONNECTORS	PRICE
--------------	-----------------	------------------	---------	----------------	-------

Standard couplings					
SY230FD	G 1/4"	F	Ø 6mm	ISO 6150-B	€6.50 B
SY250MD	R 1/4"	M	Ø 6mm	ISO 6150-B	€9.10 B

CLAW COUPLING (FIREFIGHTER TYPE)


Temperature resistance: -5°C ~ +60°C.
Max air pressure: 10 bars. Material: brass
STANDARD : NFE 29573

SYRP4F	G 1/2"	F	-	-	€9.80 B
SYRP4M	G 1/2"	M	-	-	€8.90 B
SYRP4T	Ø int. for hose 13mm to 15mm	T	-	-	€10.50 B

REDUCER

SY32FM	R 3/8" G 1/4"	M F	-	-	€4.80 B
---------------	--------------------------------	----------------------	---	---	----------------

3/8" Tapped male / 1/4" parallel female
Brass and nickel-plated brass
Operating pressure : 0 to 15 bar




EURO EUROPEAN PROFILE
HIGH OUTPUT
USED ACROSS EUROPE

ISO 6150-B ISO 6150-B PROFILE
STANDARD OUTPUT
USED IN BENELUX, SPAIN, FRANCE,
NORWAY AND SWITZERLAND

BRITISH BRITISH PROFILE
STANDARD OUTPUT
USED IN THE UK

360° ARTICULATED CONNECTORS

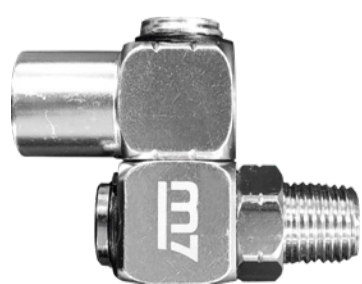

THREAD DIAMETER
R 1/4"

TYPE
MALE
FEMALE



SY2011M
ARTICULATED COUPLING
360° rotation

€15.40 B

CONNECTORS FOR QUICK COUPLINGS

SY251F	G 1/4"	F	Ø 7.2mm HIGH OUTPUT	EURO	Pack of 2 €7.80 B
SY281F	G 1/4"	F	Ø 6mm	BRITISH	Pack of 2 €10 B
SY261M	R 1/4"	M	Ø 7.2mm HIGH OUTPUT	EURO	Pack of 2 €7.40 B
SY281M	R 1/4"	M	Ø 6mm	BRITISH	Pack of 2 €8.60 B
SY261F	G 1/4"	F	Ø 6mm	ISO 6150-B	Pack of 2 €7 B
SY251MD	R 1/4"	M	Ø 6mm	ISO 6150-B	Pack of 2 €3.50 B
SY351MD	R 3/8"	M	Ø 6mm	ISO 6150-B	Pack of 2 €5.30 B
SY351F	G 3/8"	F	Ø 8mm	ISO 6150-B	Pack of 2 €13.70 B
SY371M	R 3/8"	M	Ø 8mm	ISO 6150-B	Pack of 2 €25.90 B
SY381M	R 3/8"	M	Ø 6mm	BRITISH	Pack of 2 €11.20 B
SY471M	R 1/2"	M	Ø 8mm	ISO 6150-B	Pack of 2 €10.60 B

Quick coupling	Profile	Tip											
		EURO	EURO	ISO 6150-B	ISO 6150-B	ISO 6150-B	ISO 6150-B	ISO 6150-B	ISO 6150-B	ISO 6150-B	BRITISH	BRITISH	BRITISH
SY271F	ISO 6150-B			✓	✓	✓							
SY271M	ISO 6150-B			✓	✓	✓							
SY372M	ISO 6150-B						✓	✓	✓				
SY471F	ISO 6150-B						✓	✓	✓				
SY200FD	ISO 6150-B			✓	✓	✓							
SY300FD	ISO 6150-B			✓	✓	✓							
SY400FD	ISO 6150-B			✓	✓	✓							
SY200MD	ISO 6150-B			✓	✓	✓							
SY300MD	ISO 6150-B			✓	✓	✓							
SY400MD	ISO 6150-B			✓	✓	✓							
SY1213F	EURO	✓	✓										
SY1233F	ISO 6150-B			✓	✓	✓							
SY1313F	EURO	✓	✓										
SY1333F	ISO 6150-B			✓	✓	✓							
SY1413F	EURO	✓	✓										
SY1433F	ISO 6150-B			✓	✓	✓							
SY0213M	EURO	✓	✓										
SY0233M	ISO 6150-B			✓	✓	✓							
SY0313M	EURO	✓	✓										
SY0333M	ISO 6150-B			✓	✓	✓							
SY0413M	EURO	✓	✓										
SY0433M	ISO 6150-B			✓	✓	✓							
SY3213H	EURO	✓	✓										
SY3233H	ISO 6150-B			✓	✓	✓							
SY3313H	EURO	✓	✓										
SY3333H	ISO 6150-B			✓	✓	✓							
SY3413H	EURO	✓	✓										
SY3433H	ISO 6150-B			✓	✓	✓							
SY230FD	ISO 6150-B			✓	✓	✓							
SY250MD	ISO 6150-B			✓	✓	✓							



FOCUS

**We focus on what matters :
compact, light and powerful powertools.**

It's not about us.
It's all about you and your needs.
Pneumatic and cordless tools that do
the job efficiently,
reduce physical loading, provide handling comfort
and that are highly adaptable.





+33 5 49 30 33 27

kingtoneurope.com

service-clients@kingtony.eu



catalog.mightyseven.eu

Offer valid until 31/12/2023 – Non-contractual photographs
King Tony Europe SAS, capital : €7,350,000 – Company registration numbers: 424 737 138 - FR 26 424 737 138
King Tony reserves the right to modify or delete references without prior notice.